



E-SWITCH®

ELECTROMECHANICAL SWITCHES

A COMPREHENSIVE GUIDE

An overview of essential
switch products and markets

e-switch.com





E-SWITCH®

**WE WILL ALWAYS
DELIVER SELECTION,
SERVICE AND SPEED.**

E-Switch, headquartered in Minneapolis, Minnesota, has been delivering quality electromechanical switches since 1979. Our mission, as the premier provider of integrated switch solutions, is to deliver exceptional customer service and simplify the process for engineers to select and source innovative solutions.

e-switch.com

ABSTRACT

This eBook offers insight into electromechanical switches: their history, what they've become, why they're so ever-present and how they've improved all the technologies and devices that have given us our modern way of life.

This eBook covers the wide range of switches now available for different applications. It shows how they share common features and benefits while also demonstrating why certain switch types are more likely to be integrated into specific products and markets.

Finally, it looks ahead to see how switch technology can overcome the technical and commercial challenges that engineers face to bring further levels of convenience, productivity and wellbeing into our daily lives.



E-SWITCH®

ENERGIZING INNOVATION

TABLE OF CONTENTS

ABSTRACT	PG. 1
TABLE OF CONTENTS	PG. 2
INTRO AND BRIEF HISTORY	PG. 3
7 STEPS FOR FINDING A SWITCH	PG. 4-11
<u>SWITCH / ACCESSORY TYPES</u>	
ANTI-VANDAL	PG. 12-13
CAPACITIVE	PG. 14-15
PIEZO	PG. 16-17
KEYLOCK	PG. 18-19
PUSHBUTTON	PG. 20-21
EMERGENCY STOP	PG. 22-23
TACTILE	PG. 24-25
ROCKER	PG. 26-27
ROTARY	PG. 28-29
DIP	PG. 30-31
ROTARY DIP	PG. 32-33
DETECTOR	PG. 34-35
TOGGLE	PG. 36-37
SNAP ACTION	PG. 38-39
SLIDE	PG. 40-41
NAVIGATION	PG. 42-43
TILT	PG. 44-45
TRIGGER	PG. 46-47
CONNECTORS	PG. 48-49
CAPS	PG. 50-51
NOTES	PG. 52
GLOSSARY & IP CHART	PG. 53

INTRO/HISTORY

While rapid progress in electrical science was made in the early 19th century by renowned names like Benjamin Franklin, André-Marie Ampère and Georg Ohm, the late 19th century would see incredible advancements in electrical engineering with the likes of Thomas Edison, Alexander Graham Bell and Nikola Tesla helping turn electricity from a scientific curiosity into an essential tool for everyday life.

These advances, in turn, drove the need for new and different electromechanical switches due to the increasing complexity and sophistication of electrical systems. Electric pushbuttons would come on the market in the 1880s. In 1891, Almon Brown Strowger invented the first commercially successful, fully automatic rotary switch for use in telephone systems. In 1917, inventors William J. Newton and Morris Goldberg patented the design for the first toggle light switch.

As technology evolved, devices and components became smaller, more efficient and capable of handling higher power densities. In 1979, E-Switch began developing switches with enhanced durability and greater versatility. These innovations have proven crucial for applications ranging from consumer electronics to industrial automation and medical devices, where the reliability and performance of switches directly impacts the overall functionality and safety of the systems they control.

7 STEPS FOR SELECTING THE RIGHT SWITCH




E-SWITCH®






E-SWITCH®

WHAT TYPE OF SWITCH ARE YOU LOOKING FOR?



Anti-Vandal




Caps



Connectors



Detector




Dip



E-stop



Keylock



Navigation




Pushbutton




Rocker




Rotary




Rotary DIP




Slide



Snap Action



Tact



Tilt



Toggle




Touch-Sensor



Trigger



Wired



E-SWITCH®

WHAT ELECTRICAL RATINGS ARE NEEDED?

1. Is the product AC or DC?

- Common voltages for AC: 125VAC, 250VAC
- Common voltages for DC: 3, 6, 12, 24 and 48VDC

2. How many amperes does the switch need to handle?

- Low Power is in the milliamps
- Medium Power is from 2 amps to 5 amps
- High Power is greater than 6 amps

3. If you're looking at medium to high power, what agency approvals are needed?

- Where the product is sold determines what approvals are needed





HOW MANY POLES & THROWS DO YOU NEED?

Poles are the number of closed independent circuits.

Throws are the number of positions in which a given pole is closed.


SPST

Single pole
Single throw




SPDT

Single pole
Double throw




DPST

Double pole
Single throw



DPDT

Double pole
Double throw

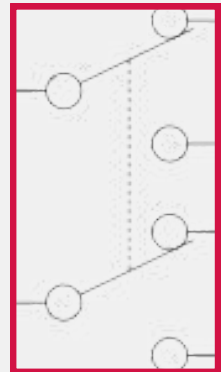

Basic examples

SPST - Flashlight: 1 pole for turning the light on/off

SPDT - Vacuum Cleaner: 1 pole for power, 1 throw for low speed, 1 throw for high speed

DPST - Air Conditioner: 1 pole controls the chiller, 1 pole controls the fan

DPDT - Hair Dryer: 1 pole controls the heater, 1 pole controls the fan, 1 throw is for low speed, 1 throw is for high speed



E-SWITCH®

HOW DOES THE SWITCH ATTACH TO YOUR PRODUCT?


1. Panel Mount


- What's the panel cutout size?
- What's the thickness of the panel?
- What type of termination?
- Quick connect, solder lug or custom cable assembly?



2. PCB Mount

- What type of termination?
- Through hole or surface mount?
- Switch outline size?
- What type of actuation?
- Right angle or vertical?
- Do you need a process sealed component?

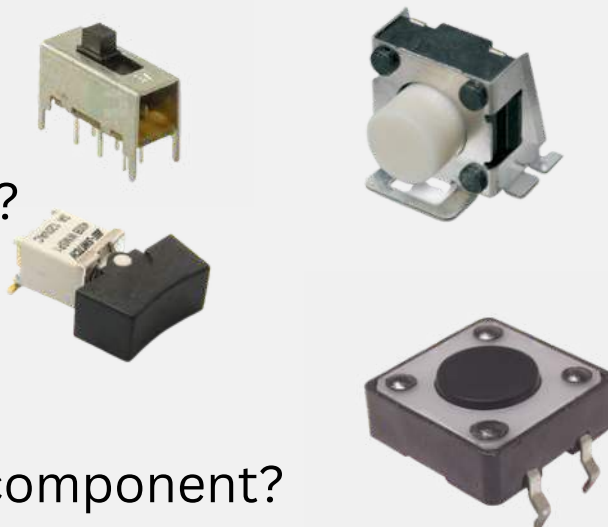




E-SWITCH®

WHAT IS YOUR APPLICATION?

Knowing the application that the switch goes into aids us in the ability to look for unique instances where certain switches work better than others.





E-SWITCH®

ARE THERE ANY ADDITIONAL REQUIREMENTS?

Many products have requirements that are not initially thought of. Some might make the switch more aesthetically pleasing and others will help the switch perform better under special circumstances:

- Momentary or latching function
- Illumination (LED, neon, etc.)
- Sealed protection (IP rating)
- Custom cap options
 - Colors
 - Graphics
 - Styles
- Long life expectancy
- High inrush or horse power rating
- Extreme temperature rating
- Custom user requirements





E-SWITCH®

WHAT'S THE ESTIMATED ANNUAL USAGE (EAU)?

If you're looking for a custom switch, it's important to know an accurate EAU for your project. Once we know, we're able to determine how feasible certain customizations are.


Unique, custom requirements sometimes incur additional tooling charges, so knowing in the beginning will help expedite the entire process.

ENERGIZING INNOVATION




E-SWITCH®

SWITCH TYPES: ANTI-VANDAL

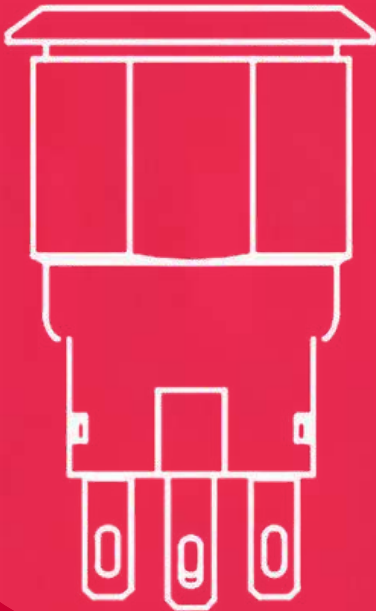


**Tamper Resistant;
Sealed IP Ratings**



**6mm to 40mm
Cutout Diameter**



**Multi-Illumination
Options**



Wire Leads Available

- Durability and long-life expectancy for high security locations and rugged-use environments.
- LED illumination potential, including bi-color and RGB.

e-switch.com 



E-SWITCH®



PVHC4



ULV8



PV0

PV7



ULV4



ANTI-VANDAL SWITCHES


Our PV Series ranges from a 12mm panel cutout (PV0) all the way to a cutout sized 40mm in diameter (PV10). These IP67-rated anti-vandals come with long life expectancies, comprehensive illumination choices and various terminal options, including solder lug, wire leads, molded boot and a detachable socket. Our UL-certified ULV Series also features the same variety of terminal options to save you time and money by eliminating the need to second-source wire leads and assembly, as well as the ability to select custom actuator graphics.

If you're looking for a power rated anti-vandal, our recently released PVHC4 (19mm cutout) and PVHC7 Series (22mm cutout) are high-current switches rated for 20A @ 250VAC and 25A @ 30VDC (UL listed) with IP67 seal ratings and LED illumination potential.



E-SWITCH®

SWITCH TYPES: CAPACITIVE

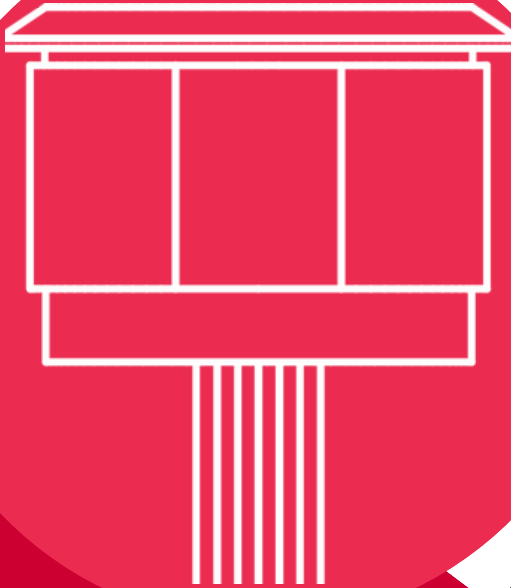


**Touch Sensor
Technology**



**19mm or 22mm
Panel Cutout**



**Lens Illumination
Styles**



Wire Leads Available

- Detects touch or proximity by measuring changes in capacitance, which is the measure of a system's ability to store an electric charge.

e-switch.com 



E-SWITCH®




CS



CS



CS

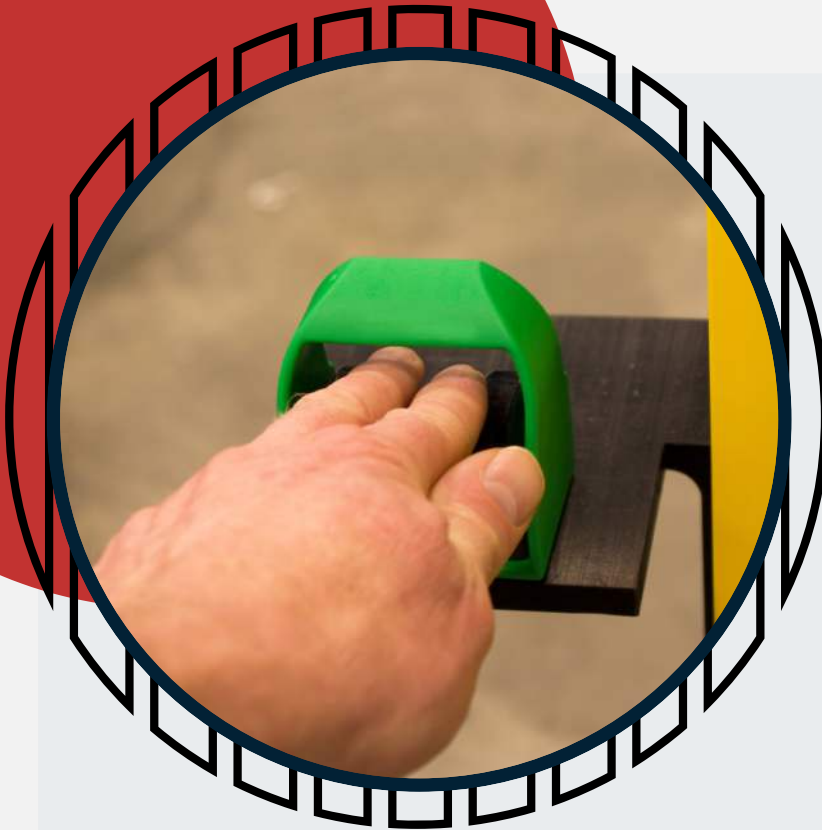

CAPACITIVE SWITCHES


Capacitive touch switches are commonly used in various electronic devices and applications, including smartphones, tablets, touch-sensitive control panels and displays, laptops and computers, automotive interfaces, gaming consoles, home automation systems, industrial controls, medical devices and public spaces.

Since capacitive touch switches have no physical moving parts, they're more durable and longer lasting than mechanical switches. The CS Series has an electrical life of 50 million cycles, an IP68 seal rating, latching or momentary functions, illumination options, 19mm or 22mm panel cutout sizes and comes pre-wired with a connector.



E-SWITCH®


SWITCH TYPES: PIEZO

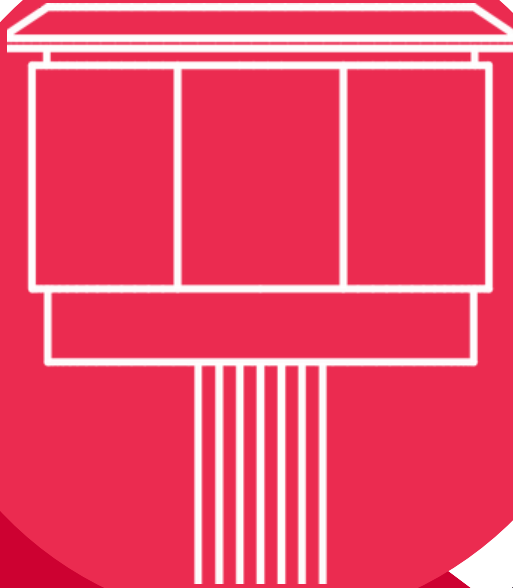

- Uses the piezoelectric effect (materials ability to generate an electric charge in response to applied stress) to convert mechanical pressure into an electrical signal.




**Momentary Pulse
Function**



**16mm, 19mm or
22mm Cutout**



**Ring Illumination
Available**



**Wire Leads with
Connector**

e-switch.com 



E-SWITCH®



PZ7



PZ3



PZ4



PIEZO SWITCHES


E-Switch offers the PZ Series – a pressure sensitive Piezo switch with momentary pulse function, allowing for precise control and feedback. With no moving parts, the PZ Series is extremely durable and resilient to typical wear and tear with an electrical life of 50 million cycles and a fully sealed IP68 rating.

The series is available in three different cutout sizes: PZ3 (16mm cutout), PZ4 (19mm) and PZ7 (22mm). The PZ3 is only available non-illuminated, but the larger sizes have the option of ring illumination with RGB LED options. The PZ Series comes pre-wired (150mm or 300mm) with a connector.



E-SWITCH®

SWITCH TYPES: KEYLOCK

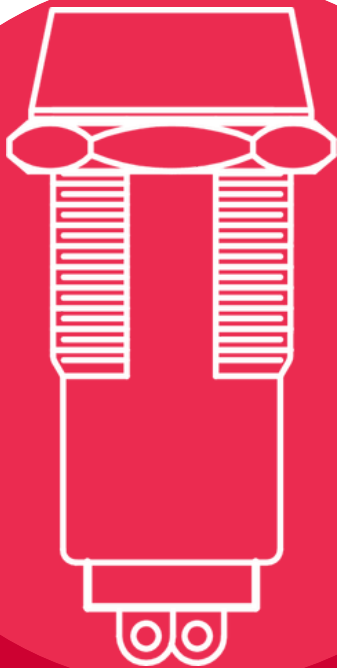

**Variety of Key
Types and Pulls**



**From 1 to 5,000
Unique Key Codes**



**Up to 4A, 125
Electrical Rating**



**Illuminated Selector
Option**

- Used to control access to electrical devices or systems. They offer a physical barrier to prevent casual or unauthorized operation of equipment. The switch typically has multiple positions or modes.

e-switch.com 



E-SWITCH®



PVK4



KO



PVK4



KEYLOCK SWITCHES


E-Switch offers both the KO Series and PVK4 Series for keylock products. The KO Series is highly customizable with a variety of size and product package selections for your application. You can choose between barrel or flat key options, as well as a variety of key types and key pulls. You can have anywhere from one to 5,000 key codes (the uniqueness of the key), dependent on the series. They have an electrical rating of up to 4A @ 125VAC and a panel mount design.

The PVK4 Series fits a 19mm cutout, and the selector actuator is rated IP65 for dust and moisture protection while the keylock actuator option is rated IP40. The selector arrow can be illuminated with many LED color and illumination voltage options.



E-SWITCH®

SWITCH TYPES: PUSHBUTTON

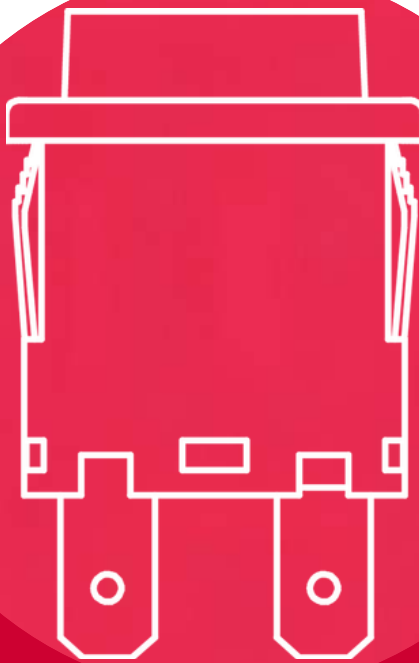

- From miniature size with low current ratings to industrial-use with horsepower ratings.
- Shape options include square, round, oval and rectangle while some offer configurable caps.




**Industry Leading
Selection**



**From Low Power to
Horsepower**



**Multi-Illumination
Options**



**Extensive
Termination Options**

e-switch.com 



E-SWITCH®



RP8100



TL2201



PB300



PA4



KJE32

PUSHBUTTON SWITCHES

Pushbuttons are ever-present in our daily lives, and there's a good chance you've interacted with our RP8100 Series — it's a round, SPST, LED illuminated switch with an IP67 rating and a threaded or snap-in panel mount design, along with a pre-wired option. The TL2201 Series is a great example of a popular subminiature pushbutton switch with DPDT or 4PDT functionality.

We also have heavy duty, industrial power pushbutton switches like the PA4 Series, which is rated for up to 16A (UL certified), and the KJE32 Series, rated for up to 20A (TUV and UL listed), which includes an electromagnet for protection against power outages and unexpected restarts.



E-SWITCH®

SWITCH TYPES: EMERGENCY STOP



**Multiple Illumination
Options**



**Compact 16mm Panel
Cutout**



**UL, VDE and TUV
Approvals**



Rated up to 8A

- Also known as E-Stops, these safety mechanisms are used to quickly shut down machinery in emergency situations when standard shutdown procedures are not feasible.

e-switch.com 



E-SWITCH®



E100



E100



E200



E200



E-STOP SWITCHES

Emergency stop pushbuttons are crucial for ensuring safety in various industrial and commercial settings, and many safety standards and regulations often mandate E-Stops in specific applications and environments.


Our E100 and E200 Series emergency stops both feature an IP65 rating, UL listed ratings, easy operation and a pushlock turn design to reset. A high actuation force limits the potential for accidental user error.

Illumination options include LED, neon or incandescent with multiple voltage choices, or these e-stops can be configured without a lamp (non-illuminated).



E-SWITCH®

SWITCH TYPES: TACTILE

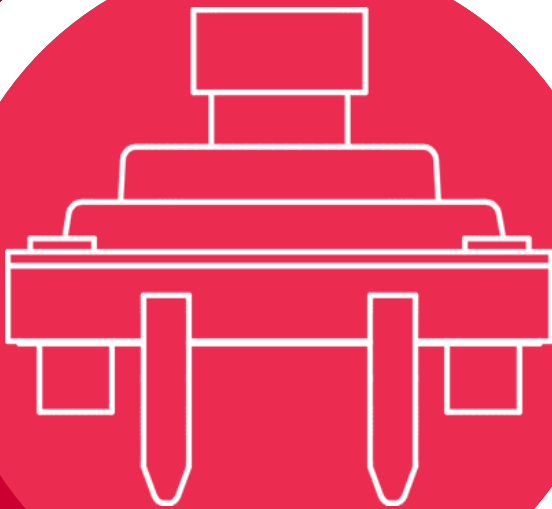


**From Miniature to
12.4mm Square**



**Extremely Low
Profiles**



**Wide Range of
Styles and Shapes**




**SMT, Through Hole
and Right Angle**

- Reliability, long operation and compact size make them ideal for wearable tech, handheld devices and printed circuit boards (PCB).
- Numerous styles: Illuminated, non-illuminated, caps, round, square, rectangle and oval.

e-switch.com 



E-SWITCH®



TL3315



TL3340



TL3301



TL6330



TL1015



TACTILE SWITCHES

Here at E-Switch, we've made our name in the tactile switch product category. Currently, we boast 75 unique tact product series (each with their own styles, dimensions, benefits and features) for use in application designs.

Think of any size (ultraminature, low profile, etc.), any mounting option (SMT, right angle, reverse through hole, etc.) and any unique product feature (operating temperature range, operating force options, long life cycles, etc.) and you'll be sure to find the appropriate tactile switch for your project within our complete product catalog.



E-SWITCH®

SWITCH TYPES: ROCKER




**Miniature to
Industrial Size**



**Low Current to High
Power Ratings**



**Multi-Illumination
Options**




**Extensive
Termination Choices**

- Known for their intuitive ease of use, tactile feedback and wide range of application. Rockers come in different sizes, colors, styles and possess robust durability and reliability.

e-switch.com 



E-SWITCH®

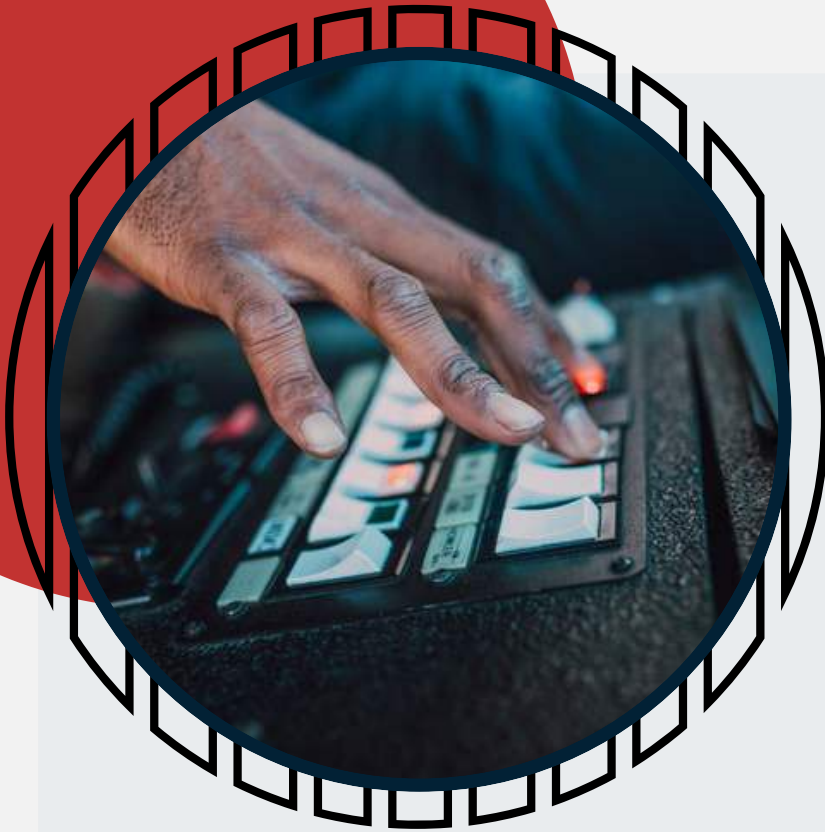

300



WB2



R1966



RBW2



RB5

ROCKER SWITCHES


Sealed miniature, subminiature and ultra-miniature products meant for either panel mount or compact PC mount installation. Other options include illumination, custom actuator markings (bi-color as well), slim actuators, power rocker switches and PVC caps for protection against water and dust in harsh environments.

The versatility and customization offered by our rocker switches is best exemplified by the recent release of the RB3 and RB5 Series sealed, illuminated power rocker switches. They both feature an IP67 rating and are certified to handle up to 25A. They can feature single or double-illumination (various colors and voltages to pick from), eight different actuator markings and multiple actuator and housing colors.




E-SWITCH®

SWITCH TYPES: ROTARY

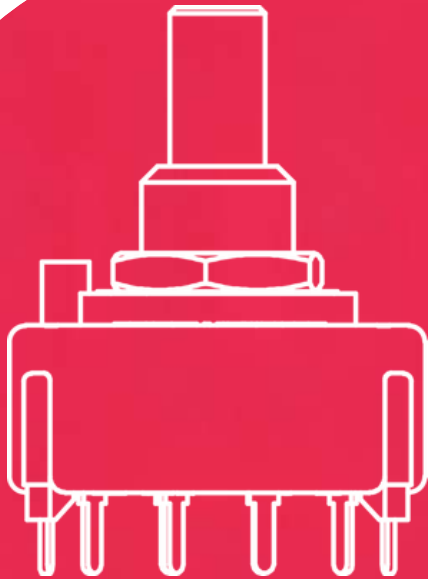

- Uses a rotating mechanism to select one of several positions or settings. Commonly used to control and configure circuits in a wide range of applications.




**Up to 4 Poles and
12 Positions**



**Through Hole and
Solder Lug**



**Shorting or Non-
Shorting**



**Actuator Style,
Length Options**

e-switch.com 



E-SWITCH®



KC



KC



KC1901



KC

ROTARY SWITCHES


The KC Series features anywhere up to four poles and 12 positions with no stop option. It can be configured as non-shorting break-before-make (BBM) or shorting make-before-break (MBB). You can select a flat, round or slotted actuator while customizing the length. The switch has a panel mount or through hole mounting design.

The KC1901 Series has a through hole mounting design and SP9T (single pole, nine positions) functionality with positive detents. The switch has only 9.8mm height off the PCB and a length of 12.40mm.




E-SWITCH®

SWITCH TYPES: DIP

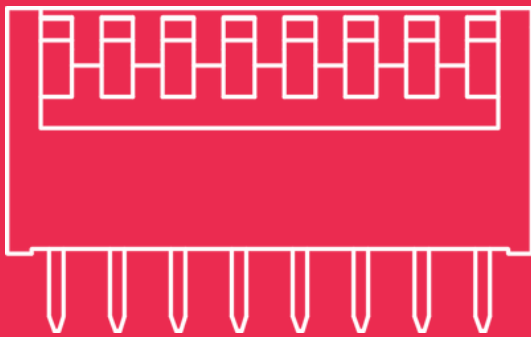


- A set of electrical switches packaged in small housing, allowing a range of inputs to a device based on the position of the individual switches within the line.




**From 1-16
Positions**



**Simple, Flexible,
Low Cost**



**Easily Customizable
Configurations**




**Ability to Quickly
Change Positions**

e-switch.com 



E-SWITCH®



KAG





KAS

KAE



KAP

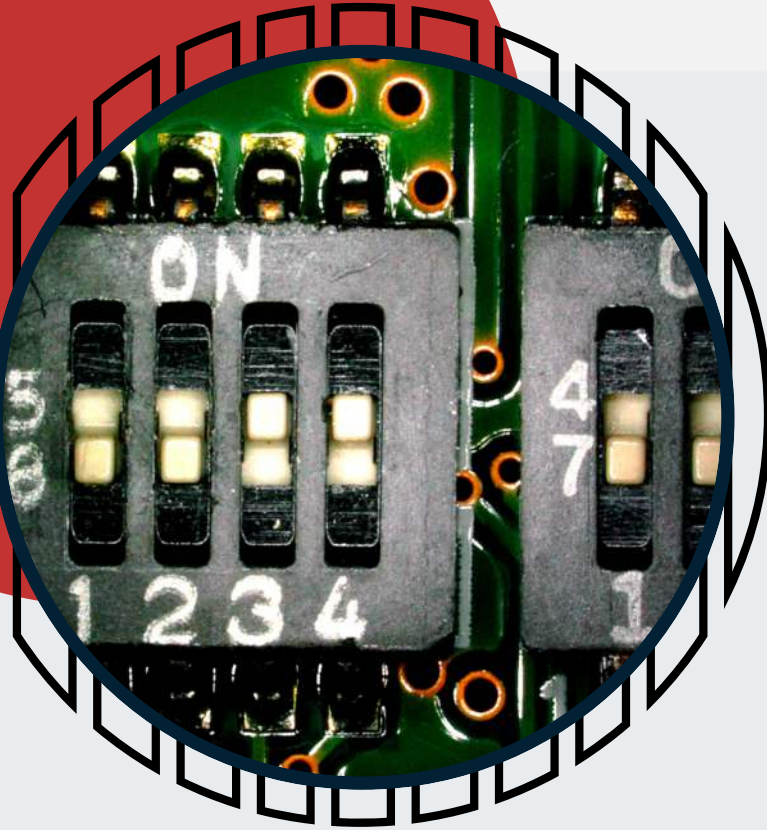

DIP SWITCHES


Our selection of DIP switches includes products with slide, piano, and half pitch designs. The actuators are low profile, featuring from one to 12 positions, with a tri-state option also available. Actuators can also come extended or recessed (with or without a top tape seal). These switch types also feature gold contacts and robust storage/operating temperatures.

Termination types include SMT gull wing, splayed, straight, PC pin or right angle PC pin. They're available in tube or tape and reel packaging. The most recent release is the KAG Series – designed for high reliability and versatility.




E-SWITCH®

SWITCH TYPES: ROTARY DIP




**From 4-16
Positions**



**Termination,
Actuator Options**



**IP67 Seal Ratings
Available**



**Real or
Complementary Code**

- Used for setting binary values in a device. Each position on the dial corresponds to a specific binary value, allowing users to set different combinations of on/off or high/low states.

e-switch.com 



E-SWITCH®



DR



RDM



RDM

RDT



ROTARY DIP SWITCHES

Rotary DIPs are used in situations where manual configuration is necessary, and the binary-coded positions allow for a straightforward way to set various options in circuits. E-Switch rotary DIPs include up to 16 positions, PCB termination and IP67 ratings.

The RDM and RDT Series both offer IP67 ratings, up to 16 positions, gold contacts, real or complementary code, multiple actuator and termination options and either tube or tape and reel packaging.



E-SWITCH®

SWITCH TYPES: DETECTOR



**Limit and Reed
Type Switches**



**Long Life and Sealed
Options**



**Subminiature and
Ultraminiature**



**Variety of
Termination Types**

- Commonly employed in various applications where the detection of a specific state or object is necessary, such as industrial automation, security systems and electronic devices.


e-switch.com 



E-SWITCH®



TD1146

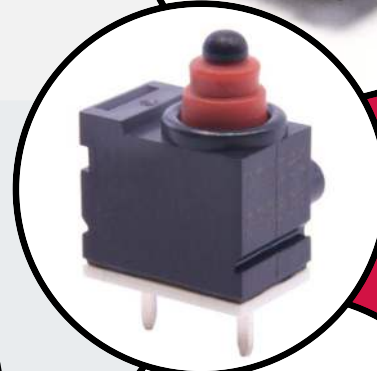


TD1250



MR1000



PP1

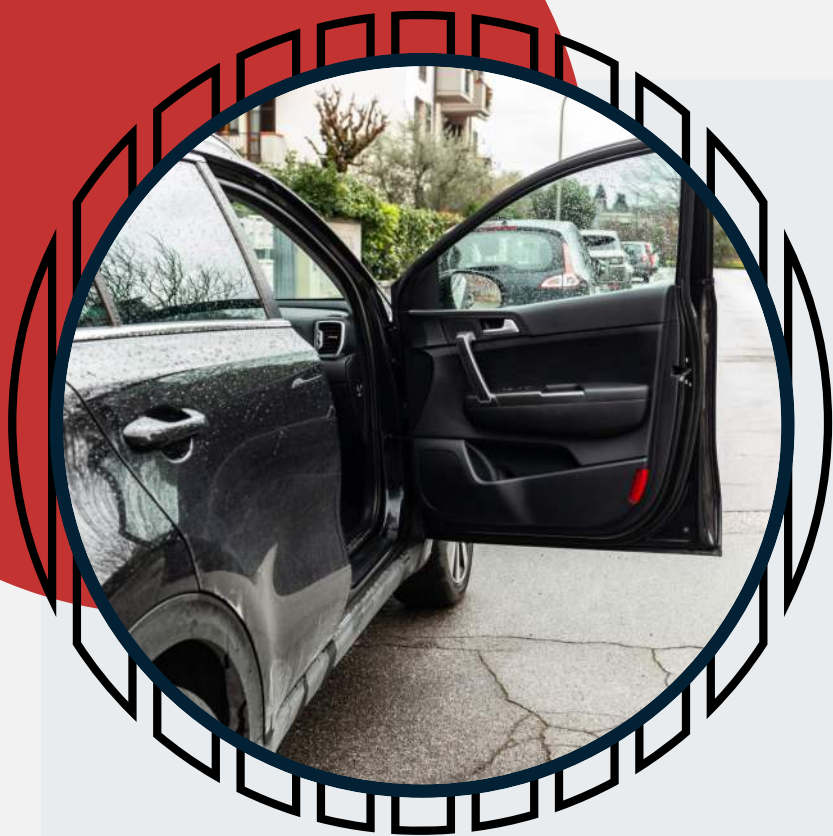

DETECTOR SWITCHES

The specific operation of a detector switch depends on its type and technology. For example, in a limit switch, the movement of an actuator might physically open or close electrical contacts.

E-Switch has one of the largest selection of detector switches on the market with the following lineup: the 900 Series (subminiature, SMT right angle), MR1000 Series (recessed magnetic/reed type), PP1 Series (push-pull, UL approved up to 16A and 1HP), PP2 Series (push-pull, UL approved up to 16A and 1HP), TD1146 Series (SMT, ultra-miniature), TD1150 Series (IP67, through hole), TD1250 Series (long life, IP67) and TD4700 Series (ultra-miniature, SMT).



E-SWITCH®

SWITCH TYPES: TOGGLE



- Characterized by the presence of a manually operated lever which controls the flow of electrical current from the power supply to a device.




Miniature to High Power



Mounting, Actuator, Bushing Choices



Durable and Cost-Effective




Versatile Functionality

e-switch.com 



E-SWITCH®

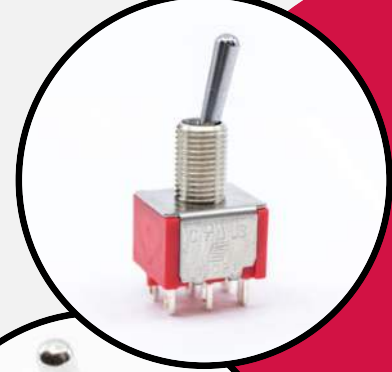


100



200A



ST1

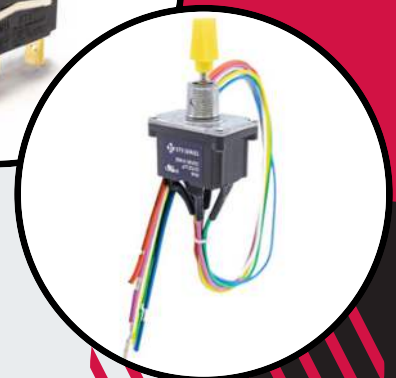

ST5



TOGGLE SWITCHES

E-Switch offers toggle switches with multiple features and benefits, such as different actuator, bushing and terminal options. There are selections for low to high current ratings, as well as some toggle switches with horsepower ratings for industrial applications.


One of our most popular products is the highly versatile 100 Series. It's a miniature toggle featuring up to four poles, 17 types of mounting options, 11 actuator choices and 15 different bushing selections.

If you're looking for something with more power, our ST Series is a high-current toggle switch rated for up to 20 amps, along with the required agency approvals. Like all of our panel mount products, the ST Series is available pre-wired.



E-SWITCH®

SWITCH TYPES: SNAP ACTION

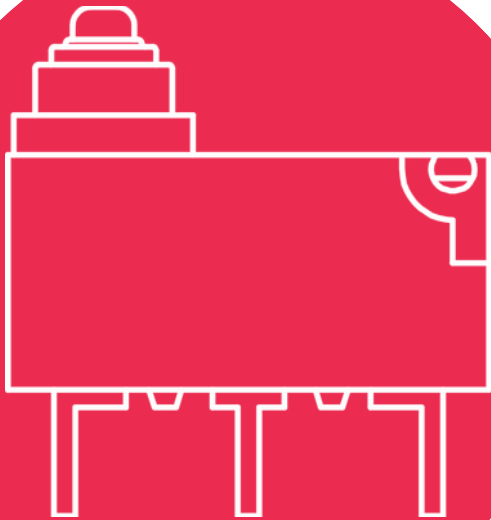

**Quick, Reliable
Switching**



**Simple, Flexible,
Low Cost**



**Compact Design,
Small Footprint**



**Sealed, UL Power
Ratings**

- Require little pressure to operate, feature a rapid and decisive switch action and produce a sharp "snap" sound when actuated. Also referred to as "micro switches."

e-switch.com 



E-SWITCH®



LS




MS



TS

SS

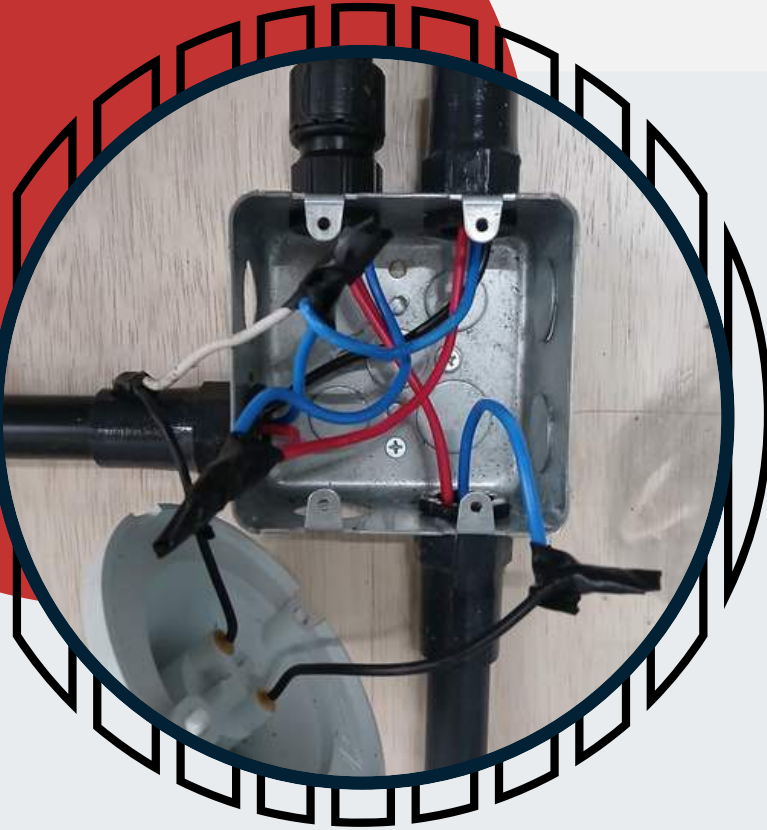

SNAP ACTION SWITCHES

Snap action switches provide a long life expectancy, numerous operating force options, exact precision and the ability to provide tactile feedback, which is important for user interaction and control in critical situations.

Reliability and dependability make these switches ideal for countertop appliances, the automotive industry, timer controls, medical devices, vending machines, electronics and robotics, aerospace, gaming devices, power tools, HVAC systems and industrial equipment.



E-SWITCH®

SWITCH TYPES: SLIDE



- Intuitive, reliable components commonly used to turn devices on or off, select different operating modes or activate specific functions by moving a slider from position to position in a linear direction.



**Multiple Positions,
Terminations**



**Simple, Flexible,
Low Cost**



**Compact Design,
Small Footprint**




**SMT, Thru Hole
Right Angle**


e-switch.com 



E-SWITCH®




EG1215




500

EGJ1210



600

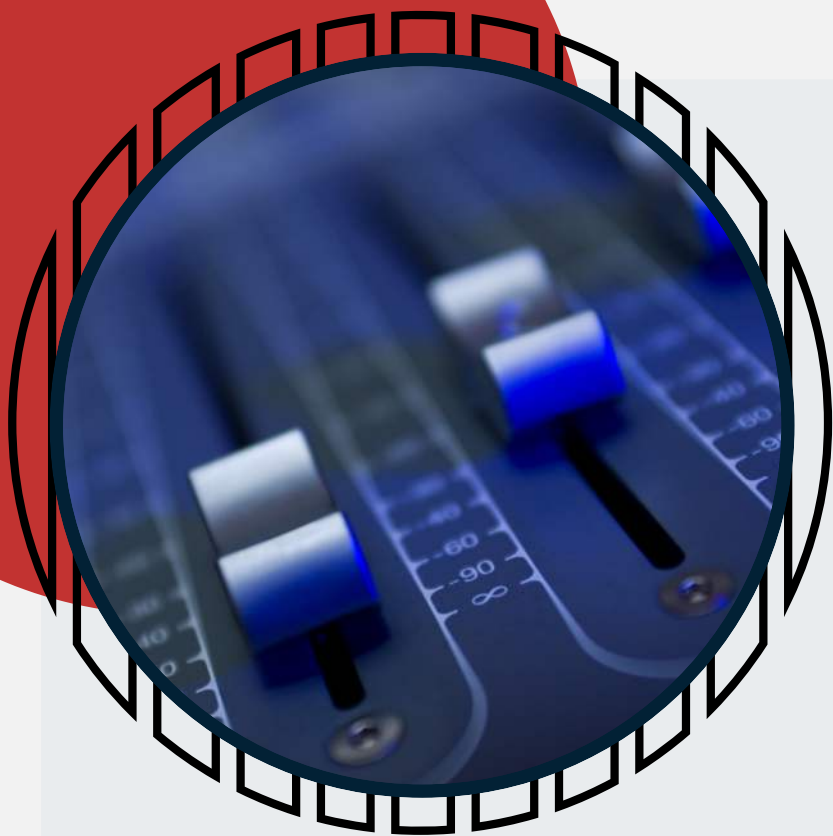

SLIDE SWITCHES

E-Switch offers a wide selection of slide switches which provide engineers and product designers many choices regarding size (miniature options, short travel), function (SPST, SPDT, DPST, DPDT) and termination styles (SMT, PCB, panel, right angle).

Reliability and dependability make these switches ideal for consumer electronics (flashlights, remote controls, toys, radios), electronic appliances (kitchen products) and electrical equipment.




E-SWITCH®

SWITCH TYPES: NAVIGATION



**5-Position,
4-Way Direction**



**Surface Mount
Applications**



**Compact Design,
Small Footprint**



**Long Life
Expectancy**

- Designed for applications that require regular user interface. Used for navigating through menus, options or interfaces on devices; provide users with an intuitive and tactile way to interact.

e-switch.com 



E-SWITCH®



JS1300



JS5208



JS1400



NAVIGATION SWITCHES



Navigation switches work by translating physical movements into electrical signals that can be interpreted by electronic devices. They can be found on gaming controllers, digital cameras or most consumer electronics that require any kind of navigational control, like smartphones, tablets, remote controls and control panels.

The JS1300 is a long life switch with very low surface mount, making it a great choice for applications with limited space. The JS1400 is even smaller and features options for actuator size and termination. The JS5208 is larger (12.4mm x 12.4mm) for applications that require precise, user friendly navigation.



E-SWITCH®

SWITCH TYPES: TILT

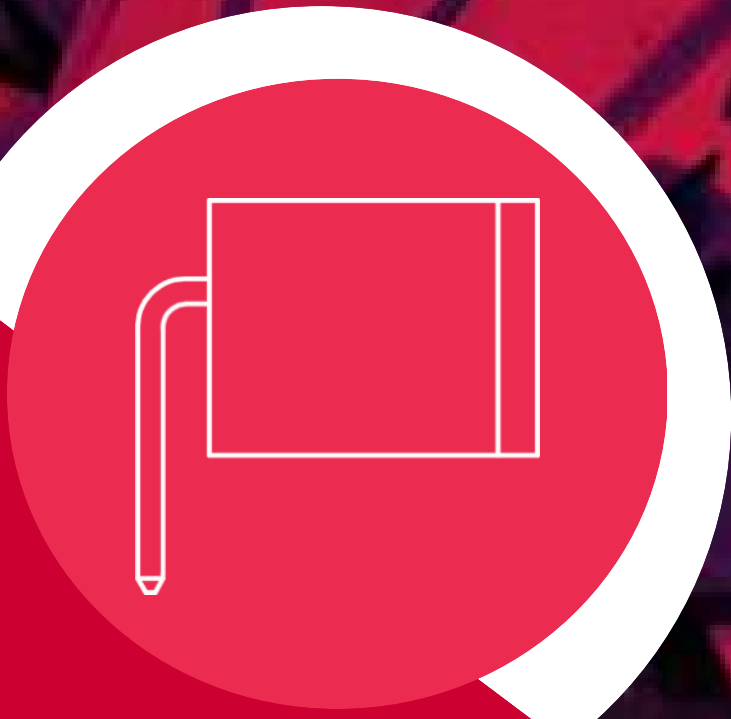

**Miniature PCB
Design**



**Triggered when
Tilted 45 Degrees**



**1,000,000-Cycle
Life Expectancy**




**Environmentally
Friendly**

- Type of sensor that detects changes in orientation or tilt and then triggers actions, like making or breaking a connection, in response to the object's position.


e-switch.com 



E-SWITCH®

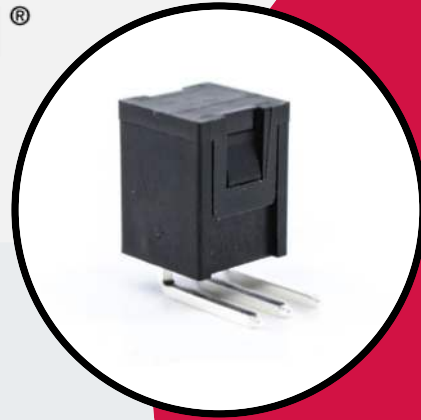

TM1000

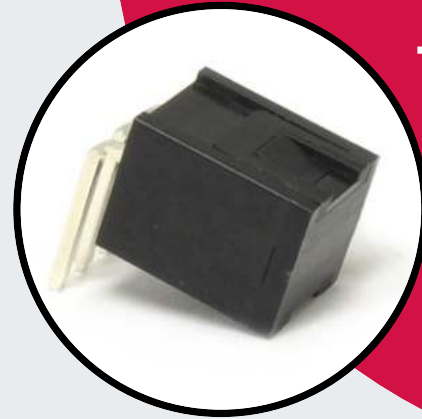

TM1000



TILT SWITCHES


The TM1000 Series tilt switch is triggered when tilted 45 degrees of the horizontal and boasts an impressive 1,000,000-cycle life expectancy. While many tilt switches use mercury, the TM1000 is environmentally friendly and mercury-free.

The switch has silver contacts, SPST functionality, an electrical rating of 20mA @ 20V(AC or DC) and a robust operating temperature of -25°C to +70°C.



E-SWITCH®

SWITCH TYPES: TRIGGER

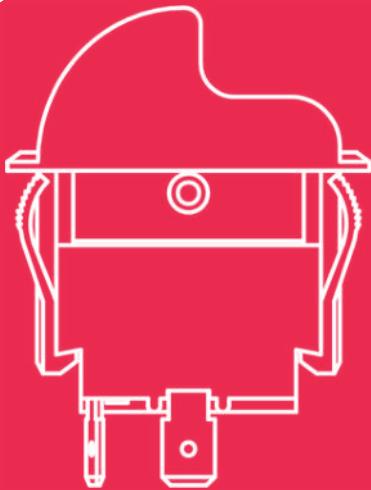

Custom Designs



**Multiple Sizes and
Body Styles**



**Custom Caps
Available**



**Work with an
Engineer Today**

- Designed to be actuated by a trigger-like mechanism. Commonly used in various devices where a quick, manual momentary activation or deactivation of a function is required.

e-switch.com 



E-SWITCH®




HY55



HY15



HY37

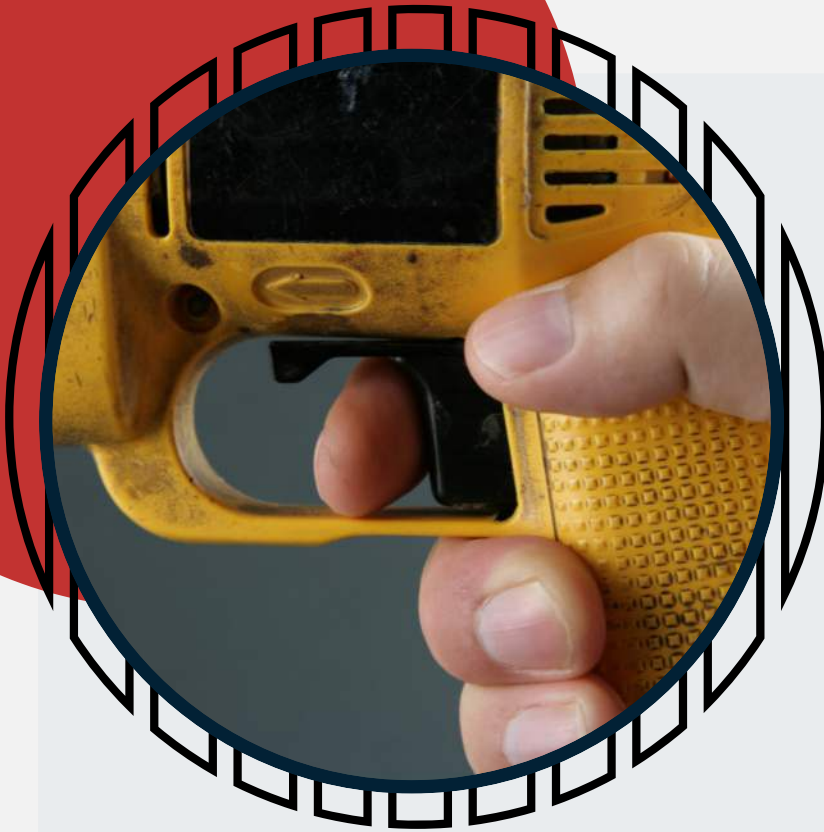

TRIGGER SWITCHES


E-Switch offers a variety of trigger switches for any application. Because each project has specific requirements, almost every trigger switch is a custom design. Many custom caps, sizes and body styles are available to choose from.

Contact a customer service representative or regional sales manager to get your project started today.




E-SWITCH®

ACCESSORY TYPES: CONNECTORS

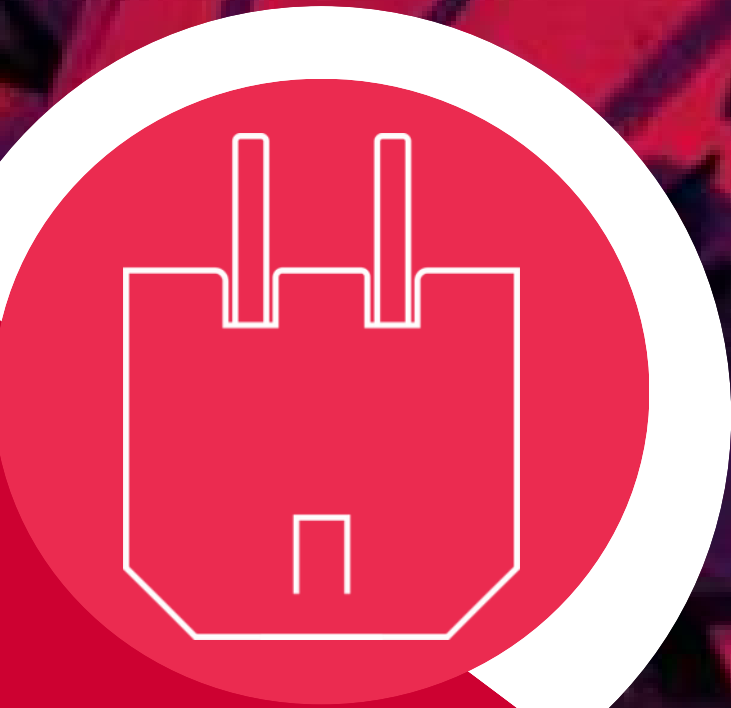

**Free hanging
system**



PCB header available



Low profile design




Two to 10 poles

- Designed to link various components within a circuit by establishing physical connections between wires, cables or devices and to facilitate the flow of signals or power.


e-switch.com 



E-SWITCH®

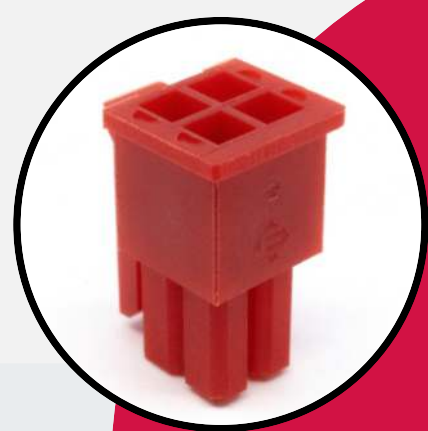


ECM3025

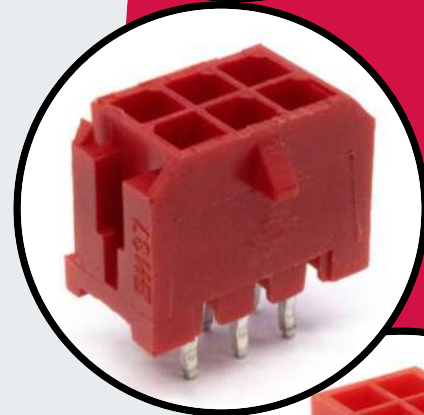

ECM3026

ECM3022

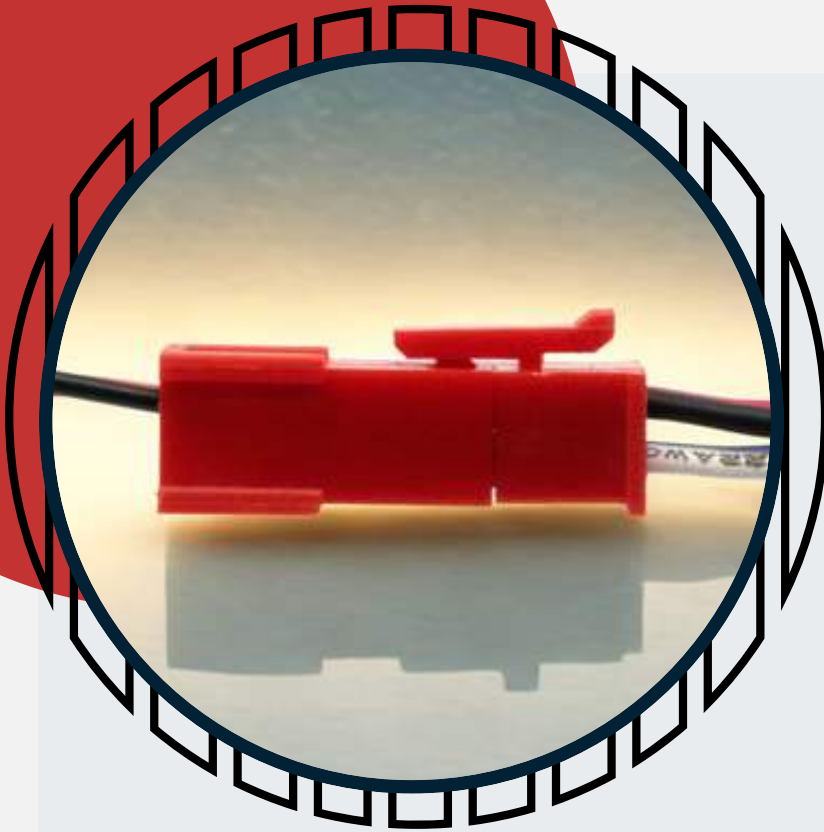

BIG RED CONNECTORS™

E-Switch's new "Big Red" ECM connector series is a wire-to-wire, receptacle-to-plug system offering free hanging 3mm spacing. It features a low profile design, robust operating temperatures and accommodates anywhere from two to 10 poles.

The ECM Series helps support flexible routing and worry-free reliability while providing adaptable performance across a variety of industry applications. The ECM3025 functions as the plug housing, the ECM3025 is the receptacle housing and the ECM3026 is a PCB header.



E-SWITCH®

ACCESSORY TYPES: CAPS



Sealed Solutions



**Standard and
Custom Colors**




**Custom Shapes
Available**

- E-Switch offers many caps (color, shape, mounting style) to provide extra durability and sealed ratings to its lineup of switch products.

e-switch.com 



E-SWITCH®

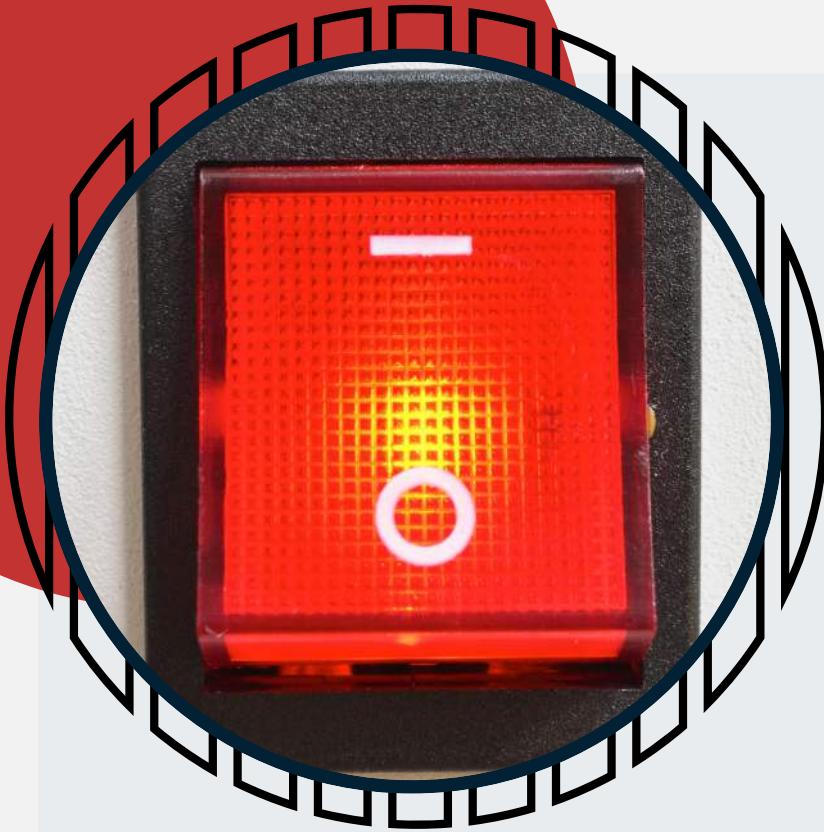

TAG



2J



TRBLK

CONFIGURABLE CAPS

E-Switch offers a variety of caps for supported switch types. Caps can add extra protection against harsh environments and use, while also potentially making desired adjustments to the sound and feel of the switch actuator.

Switch caps are differentiated by color, shape, mounting type and the specific switch product the cap is designed to fit. Customizable caps are available for most switch types, including pushbuttons, rockers, tactile, toggle and slide switches.

GLOSSARY/IP CHART

Actuator: The mechanical interface between the basic switch contacts and the means of operation, such as the operator's finger.

Actuation Force: The required force to change a circuit's electrical state.

Alternate Action Switch: A pushbutton style switch where the change of the electrical state is maintained between actuations.

Ampere: A unit of electrical current flow.

Base (Housing): A base of a switch is the main member to which the conducting parts or insulator unit are attached. It may also have parts of the operating or control mechanism attached.

Bounce: Rebounding of moving contact against fixed contact during transfer.

Break: Interruption of a circuit.

Double-Break: Occurs when a single mechanism interrupts two contacts simultaneously.

Break Before Make: The term given to a double throw circuit where the first circuit is opened before the second circuit is closed.

Capacity: Usually refers to the current handling capability of a switch.

Chatter: Rapid opening and closing of contacts, usually exhibited during extreme vibration and/or shock.

Clearance (Spacing): Distance through air between electrically live parts of opposite polarity or to ground.

Contact: The contact is a conducting part designed to be united by pressure to another conducting part for the purpose of carrying current.

Contact Bounce: Oscillation of the movable contact upon closure of the circuit.

Contact Gap: The minimum distance between the fixed and moveable contacts.

Contact Resistance: The resistance of current flow across closed contacts.

Dead-Break: Open circuit condition, usually caused when slowly actuating snap-action switches. Results from low contact pressure or contact lift-off.

Detent: Feature that indicates actuation point has been reached. Can also be referred to as tactile feel.

Dielectric Strength: The ability of an insulating material to resist voltage from arcing across its surface.

Differential: Distance between trip point (or force) and reset point (or force).

Double-Break: A mechanism that breaks the circuit at two points simultaneously by means of a "shorting bar" like device.

Double-Throw: Contact arrangement that alternately transfers normally open and normally closed circuits.

Dust-Tight: Sealed switch that will withstand sand and dust contamination.

Electrical Life: Expected cycle life when switch is operated at fully rated electrical load.

Free Position: Point at which plunger exists in the un-operated condition.

Insulation Resistance: The resistance to current flow of the insulating materials between contacts.

Lever Actuator: A device, hinged or spring type, applied to a basic switch to facilitate its application.

Make Before Break: The term given to a double throw circuit when the second circuit is closed before the first circuit is opened.

Momentary Action Switch: The term given to a switch where a circuit is continuously closed or opened only when force is applied. The electrical state returns to its normal position when the force is removed.

Normally Closed: The term given to a switch where a circuit is closed in the normal switch position.

Normally Open: The term given to a switch where a circuit is open in the normal switch position.

Operating Point: Point at which contacts transfer. Usually measured from the switch mounting holes.

Over Travel: The distance an actuator travels after the circuit is closed.

Pole: The term to denote a completely separate circuit, which passes through a switch at one time.

Pre-Travel: The movement of the actuator prior to closing the circuit. Sometimes identical to "Travel to Make."

Reset Point: Point at which contact resumes normal position.

Single-Break: Mechanism that transfers one contact.

Single Throw Switch: The circuit can be opened or closed by moving the switch blade into or out of one set of contacts only.

Snap Action: The abrupt transfer of contacts from one position to another. This action is relatively independent of the speed of actuator travel.

Splash Proof: Sealed switch that will withstand heavy rain or a stream of water.

Switch: A device for making, breaking or changing the connections in an electric circuit.

Throw: The term denotes the number of positions in which a given pole is closed.

Travel to Make: The distance parallel to the designated direction of the actuator movement at which point a circuit is closed.

Watertight: Sealed switch that will withstand submersion to various depths depending on specification level.

Wiping Action: Lateral travel of movable contact over fixed contact while pressure between the two contacts exists. Occurs during plunger travel. This action helps clean the contacts of contamination.

Switch Abbreviations

N.C.: Normally Closed circuit **N.O.:** Normally Open circuit

SPST: Single Pole Single Throw **SPDT:** Single Pole Double Throw

DPST: Double Pole Single Throw **DPDT:** Double Pole Double Throw

MBB: Make Before Break **BBM:** Break Before Make

IP Rating Chart

First Number	Definition	Second Number	Definition
<i>Protection against solid objects</i>		<i>Protection against liquids</i>	
0	No protection	0	No protection
1	Protected against solid objects over 50mm (e.g. accidental touch by hands)	1	Protected against vertically falling drops of water
2	Protected against solid objects over 12mm (e.g. fingers)	2	Protected against direct sprays up to 15° from the vertical
3	Protected against solid objects over 2.5mm (e.g. tools and wires)	3	Protected against direct sprays up to 60° from vertical
4	Protected against solid objects over 1mm (e.g. tools, wires and small wires)	4	Protected against sprays from all directions - limited ingress permitted
5	Protected against dust - limited ingress (no harmful deposit)	5	Protected against low pressure jets if water from all directions - limited ingress permitted
6	Totally protected against dust	6	Protected against strong jets of water (e.g. for use on shipdecks - limited ingress permitted)
		7	Protected against the effects of temporary immersion between 15cm and 1m. Duration of test 30 min.
		8	Protected against long periods of immersion under pressure



E-SWITCH®

ENERGIZING INNOVATION

E-SWITCH, INC.

7153 Northland Drive N
Minneapolis, MN 55428

Phone: 763-504-3525

Toll Free: 800-867-2717

E-SWITCH ASIA

8 Burn Road
#09-14, Trivex
Singapore 369977

Phone: +65 6909 0863

E-SWITCH.COM



@ESwitchInc



@e-switch-inc-

©2026 E-SWITCH, INC. ALL RIGHTS RESERVED. E-SWITCH, INC. IS A WHOLLY-OWNED SUBSIDIARY OF STEIN INDUSTRIES, INC.