

# e选

e络盟  
AN AVNET COMPANY

第 5 期

2022年3月1日 - 8月31日

[cn.element14.com/e-select](http://cn.element14.com/e-select)

携手 e络盟,  
与全球科技  
先锋同行

- 2000+ 优势品牌, 95+ 万器件在库
- 从板件到测试仪器一应俱全
- 尖端新品优先上市
- 全球直采, 本地支持

客服热线

400 820 5857

官方网站

[cn.element14.com](http://cn.element14.com)

04  
新品速递

日均引进 900 多款科技新品,  
助您的项目赢得先机

11  
半导体

汇聚来自全球热门品牌的半导  
体器件

34  
单板计算机与开发工具

了解广受欢迎的开发工具,  
从 e络盟启程, 开始您的应用开  
发之旅

08  
独家销售品牌

自有品牌专业工业和生产用组  
件、实用工具及精密设备

25  
3D 打印特辑

主流 3D 打印技术与应用创想

**ROHM**  
SEMICONDUCTOR

**maxim integrated**

NOW PART OF  
**ANALOG DEVICES**

**multicomp PRO**

**molex**

**pico**  
Technology

**e络盟** 致力于在全球范围内为数百万工程师和采购人员提供优质电子元器件产品和应用开发服务。选择通过 e络盟进行采购，无采购数量和订购金额限制。客户可以通过产品手册、网站、市场邮件、客服中心以及销售团队获取本地化产品资讯、技术和服务支持。此外，我们每周 5 天、每天 8 小时的技术支持热线为您的项目提供专业意见。

**e络盟** 面向大中华区提供来自 2,000 多家世界知名供应商的 95 万多种现货元器件产品。其中上海仓库的现货库存产品可以在中国实现翌日到货，亚洲库存 2-3 个工作日内到货，其它海外库存产品也可以实现 5 日或更短的到货周期。

您可通过我们的官方网站 [cn.element14.com](http://cn.element14.com)  
或客服热线: **400 820 5857**, 获取帮助。



### \* 免运费优惠

网单金额满人民币 200 元

(不含增值税), 即可享受免费送货。



### 智能、便捷的在线选品与采购体验

您可以从线上获取技术信息，利用智能在线报价工具批量订购，或通过我们安全的交易网站 [cn.element14.com](http://cn.element14.com) 下单，采用微信、支付宝和银联等多渠道进行支付。



### 实时多渠道的服务, 提供无忧一站式采购体验

您可以选择通过电话、在线或面对面沟通获取我们个性化的服务。智能化全球供应链系统提供现货商品当天发货，可实现快速交付。



### 资深的技术团队为您的项目提供免费咨询

注册用户通过

[cn-technical@element14.com](mailto:cn-technical@element14.com) 或致电 **400 820 3793** 免费获取 8/5 技术支持。



### 专业的报价团队为您的项目提供有力的价格支持

专业的报价团队即时响应，为您的项目提供具有竞争力的价格方案。



### 全球化分销网络, 本地化服务支持

现货供应来自全球 2,000 多家领先品牌的 95 万多种元器件产品。现货即发，无最小订购数量要求。



### 品类齐全、质量保证

所有商品 100% 经由原厂授权，产品可追溯，品质有保障。


## 免责申明

根据中华人民共和国合同法及其他相关法律的规定，本产品目录系要约邀请，在任何情况下均不视为对易络盟具有约束力的要约。

本产品目录中展示的所有产品，其售价、库存、规格、型号、参数情况会存在实时变动的可能。因此具体情况，以客户下单时为准，易络盟恕不另行通知。易络盟将对产品目录中所载信息的准确性和及时性尽最大努力，但易络盟并未就此做出任何保证，也不应当承担因本产品目录中相关信息的遗漏、不准确、不及时而引起的任何责任。同时，易络盟保留因法律或商业原因对本产品目录下的产品进行调整以至下架的权利。

客户的订单将全部适用易络盟最新版的《易络盟电子(中国)有限公司销售条件》(“销售条件”),

(详见网址: [cn.element14.com](http://cn.element14.com))

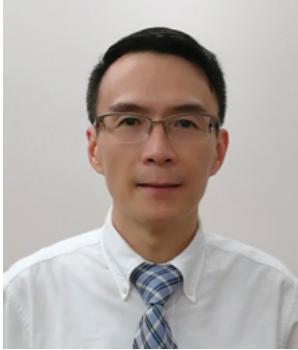

## 写在春天

大家好，我是您忠实的合作伙伴 e络盟大中华区销售总经理——黄学坚。

又一个春天和新一期《e选》一起来到了大家的面前，回顾过去、展望未来，大家有怎样的收获和新的计划？

在过去的一年里，电子行业遭遇了疫情起伏、供应链中断、价格上涨等诸多挑战，但是技术发展和新的行业探索并没有停滞不前，e络盟受益于有着极强的应变能力的服务密集型分销模式，让我们有机会开拓更多灵活的、个性化的服务项目来支持客户伙伴们。

疫情为行业带来了许多不确定因素，同时也促进了产品更新与科技变革。在本期《e选》中，我们特别聚焦日益普及的 3D 打印技术。

3D 打印因其便利性、个性化、高效率，现已在航空航天、生物医疗、汽车和建筑等多个领域得以应用，并逐步拓展进入了人们的生活，打印耗材的种类也越来越丰富。在疫情爆发初期，我们的同事运用 3D 打印设备制作防护面具赠予社区，受到广泛好评。

科技改变生活，您是不是也对这项技术充满期待呢？e络盟紧随科技潮流，拥有行业领先、品类齐全的 3D 打印设备、耗材和配件产品，配合您的创意，一定可以创造出智能有趣的作品。

行业环境瞬息万变，科技研创日新月异，客户需求日益多样，在致力于优质服务的同时，新的一年，我们仍将不遗余力持续优化线上采购系统，以确保全球客户在设计到生产各阶段获得最优的体验。

此外，我们不断加大投资，在全球的多个配送中心储备丰富的现货器件，可在全球范围内调拨给予应急补缺。

如果您对设计、生产和维护领域的产品，或针对采购、技术等方面有任何问题，欢迎联络我们的客服人员（服务热线：**400 820 5857**）。

我和我的团队将一如既往为您提供优质的服务，与您并肩开创未来！

我们愿意倾听您的心声  
— 欢迎与我们取得联系  
[cn-sales@element14.com](mailto:cn-sales@element14.com)


黄学坚  
e络盟大中华区销售总经理

e络盟 (element14) 隶属 Premier Farnell 集团，拥有超过 80 年的电子元器件分销经验。e络盟经原厂授权分销来自 2,000 多家世界级品牌的元器件产品，满足您在设计和维护方面的所有需求。

研发 > 设计 > 生产 > 维护

## 目录

### 04 新品速递

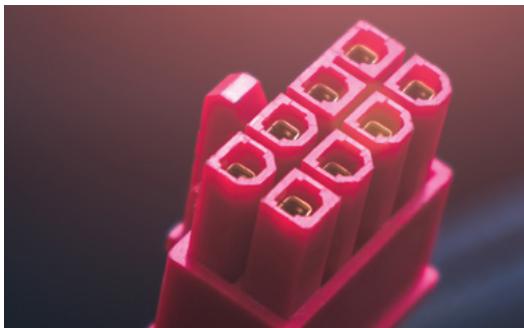

### 08 Multicomp Pro

### 11 半导体

### 18 连接器

### 22 无源元件



### 25 探寻您的 3D 打印解决方案

### 27 测试测量与维修工具

### 31 机电产品

### 34 盘点热门开发套件与原型设计工具

## 新品速递

e络盟日均引进 900 多款新品,为您带来市场前沿的尖端技术产品及系统解决方案。

欢迎在线浏览相关产品:

[cn.element14.com/eselect05\\_new](http://cn.element14.com/eselect05_new)



DUCT, SLOTTED NNC TYPE,  
1" W X 1.5" H, PPO

**PANDUIT**



- Raceway Duct, 1.88 " (H) x 0.97 " (W) x 6.56 ft (L), Grey, PPO, Panduit Type NNC
- Used to route, protect and manage wires near sensitive electronic equipment
- Panduit® type NNC metric wiring duct

20% OFF

¥ 408.21

产品编号  
**381737706**

TFT LCD MODULE, 240X240P,  
470CD/M2, 1.3"

**MIDAS**  
design • manufacture • supply



- TFT LCD, 1.3 ", 240 x 240 Pixels, Square, RGB, 3.3V

5% OFF

¥ 140.45

产品编号  
**381315606**

PRESSURE SENSOR, GAUGE,  
150PSI, 3.3VDC

**Honeywell**



- Pressure Sensor, 150 psi, SPI, Gauge, 3.3 VDC, Single Axial Barbed, 3.1 mA

5% OFF

¥ 96.17

产品编号  
**385864706**

CARTRIDGE FUSE HOLDER,  
1P, 30A, 600V, QC

**EATON**  
Powering Business Worldwide



- Cartridge Fuse Holder, 1 Pole, 30 A, 600 VAC, Quick Connect, 10 mm x 38 mm


20% OFF

¥ 49.29

产品编号  
**379694106**

MOTOR DRIVER, -40 TO  
125DEG C

**mPS**



- Motor Driver, H-Bridge, 5 A Output, 5.4 V to 28 V Supply, QFN-19, -40 °C to 125 °C
- MP6619 is an H-bridge motor driver that operates from a supply voltage up to 28V and delivers a motor current up to 5A.
- Wide 5.4V to 28V operating input range

20% OFF

¥ 23.47

产品编号  
**379820606**

PEL104 WITH CURRENT  
SENSORS

**CHAUVIN  
ARNOUX**



- PEL104 power logger measures and records all the useful data for energy consumption diagnostics.
- The PEL104 can be used without cutting off the mains power supply.
- Compact magnetized casing

3% OFF

¥ 19,544.6

产品编号  
**378301906**

BLDC MOTOR, 5000RPM,  
90W, 0.215N·M, 24V


**LINENGINEERING**  
Step Motor Specialists



- DC Motor, Brushless, 24 V, 5000 rpm, 0.215 N·m, 90 W, 42 mm

RES, OR2, 1%, 2W, METAL  
STRIP, 2512

**TE**  
ADVANCED INNOVATION



- SMD Current Sense Resistor, 0.2 ohm, TLRP Series, 2512 [6432 Metric], 2 W, ± 1%, Metal Strip

30% OFF

¥ 2.95

产品编号  
**378295706**

CAP, 1UF, 100V, MLCC, 0805

**muRata**  
INNOVATOR IN ELECTRONICS



- SMD Multilayer Ceramic Capacitor, 1 μF, 100 V, 0805 [2012 Metric], ± 10%, X7S

20% OFF

¥ 0.724

产品编号  
**378456206**

SOLENOID VALVE, 8BAR,  
0.8MM, 24VDC

**CROUZET**



- Operating Temperature: -5°C ~ 50°C
- Mounting Type: Chassis Mount
- 1,500,000 Cycles of mechanical life.
- 2/2 normally closed function. Threaded M5 connection method:

¥ 422.95

产品编号  
**378129606**

DC-DC CONVERTER, 24V, 5A

**Weidmüller**



- Isolated DIN Rail Mount DC/DC Converter, ITE, Electronic Equipment & Transformers, 2:1, 120 W

3% OFF

¥ 1,478.54

产品编号  
**378730906**

**CIRCULAR CONN, RCPT, SIZE 9, 6POS, WALL**
**Amphenol**  
Aerospace


- Circular Connector, MIL-DTL-38999 Series III, Wall Mount Receptacle, 6 Contacts, Crimp Socket
- The D38999/20WA35SN from Amphenol is MIL-DTL-38999 Series III wall mount receptacle with 6 contacts
- High reliability, moisture and corrosion resistant

**20% OFF****¥ 352.72**产品编号  
**380124206**
**TRANSCEIVER, 125MBD, 1308NM, SC CONN**
**BROADCOM**  
connecting everything+


- Fiber Optic Transceiver, 1308 nm, 3.3 V, 125 Mbaud, AFBR-58x3xxZ
- 125Mbps fast Ethernet 1x9 transceiver.
- Full compatibility with 100BASE-FX version IEEE802.3u

**5% OFF****¥ 258.93**产品编号  
**378799606**
**HEAVY DUTY CONN, SCREW, SIZE 3A**
**HARTING**  
Pushing Performance


- Heavy Duty Connector, Hood, Top Entry, Zinc Body, Screw, 3A

**¥ 418.00**产品编号  
**384640006**
**SCRWDRVER, SET, 10PCS**
**E-FACOM**


- Screwdriver Set, Slotted, Phillips, Pozidriv, Torx, Hex Blade Holder, 10 Pieces, PROTWIST Series

**¥ 842.24**产品编号  
**379767706**
**DC-DC CONVERTER, 2 O/P, 30W**
**TRACO POWER**



- Isolated Through Hole DC/DC Converter, Railway, 4:1, 30 W, 2 Output, 15 V, 1 A
- The THN 30WIR series is a DC/DC converters designed for highest reliability in harsh environments.
- Wide 4:1 input voltage range

**20% OFF****¥ 755.79**产品编号  
**382388606**
**TVS DIODE, BIDIRECTIONAL, 37V, 3KW**
**VISHAY**  
The DNA of Tech


- TVS Diode, TRANSZORB SMC3K, Bidirectional, 17 V, 37 V, DO-214AB (SMC), 2 Pins

**¥ 13.08**产品编号  
**381872406**
**OSCILLOSCOPE, 70MHZ, 1.25GSPS, LCD COLOR**
**ROHDE & SCHWARZ**  
Made since 1902


- Digital Oscilloscope, RTB2000, 4 Channel, 70 MHz, 1.25 GSPS, 10 Mpts, 5 ns
- This oscilloscope has 10.1" high resolution 1280 x 800 pixel capacitive touchscreen TFT display with gesture support

**¥ 46.74**产品编号  
**388393606**
**POWER MANAGEMENT IC, -40 TO 125DEG C**
**NXP**


- Multi Function Power Management IC, AEC-Q100, 2 Output, 36V Supply, WFQFN-EP-32, -40 °C to 125 °C

**5% OFF****¥ 20.06**产品编号  
**379071706**
**SET, PLIERS, 3PIECES**
**KNIPEX**


- Pliers Set, 3 Piece, Tool Roll Size M, 125 mm, 180 mm, 250 mm Wrench Pliers

**5% OFF****¥ 1,533.39**产品编号  
**377955606**
**TERMINAL BLOCK, FUSE, 4POS, 2.5MM2**
**WAGO**


- Fused Terminal Block, 4 Positions, 22AWG to 12AWG, 2.5 mm², Push In, 6.3 A, 250 V

**10% OFF****¥ 109.25**产品编号  
**379850906**
**KEYBOARD PB SW, 0.1A, 32VDC, THT**
**C&K**


- Pushbutton Switch, Momentary, DPDT, 32 V, 100 mA, PC Pin

**10% OFF****¥ 9.24**产品编号  
**378062006**
 人民币(元) | 自录商品参考标价  
 为自录商品  
 价格货币单位 不含税

本册产品的折扣优惠参照 2022 年 2 月 e 络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税), 该订单即可享受免费送货服务

## DATA ACQUISITION, 8 CHANNELS, 0,07V

**Ω OMEGA®**

- Data Acquisition Unit, 8 Channels, 70 mV, 201 mm
- TC-08 thermocouple data acquisition module is designed to measure a wide range of temperatures using any thermocouple that terminates in a miniature size thermocouple connector

**¥ 3,289.05**产品编号  
**379467006**

## HEAVY DUTY INSERT, PLUG, 72+PE, 10A



- Heavy Duty Connector, HDD, Insert, 72+PE Contacts, H16B, Plug, Crimp Pin - Contacts Not Supplied

**20% OFF****¥ 94.34**产品编号  
**378791906**

## CABLE CLAMP, ADHESIVE, ALUMINIUM

**E ESSENTRA  
COMPONENTS**

- Fastener, Adhesive Backed Flat Cable Clamp, Aluminium, 32.8 mm, 9 mm

**¥ 9.92**产品编号  
**384648806**

## RECTIFIER, 600V, 12A, TO-220AC

**Power  
integrations™**

- Fast / Ultrafast Diode, 600 V, 12 A, Single, 3.1V, 11.6 ns, 350 A

**10% OFF****¥ 12.20**产品编号  
**378240906**

## POWER SUPPLY, AC-DC, 12V, 2.1A

**XP XP Power**

- AC/DC Enclosed Power Supply, ITE, 1 Output, 25 W, 12 V, 2.1 A
- LCW25 series regulated output convection cooled AC-DC power supply
- ITE & industrial approvals

**5% OFF****¥ 74.52**产品编号  
**379029506****Ω OMEGA®**订购咨询:400 820 5857 | [cn-sales@element14.com](mailto:cn-sales@element14.com)\* 本册所收录的所有产品相关信息均以官网 ([cn.element14.com](http://cn.element14.com)) 所示为准


## LED, LOW POWER, BLUE, SMD, 3.3V, 465NM

**Kingbright®**

- LED, Blue, Through Hole, T-1 3/4 (5mm), 30 mA, 3.3 V, 465 nm

**30% OFF****¥ 2.56**产品编号  
**380173406**

## DRAM, 128M X 16BIT, -40 TO 95DEG C

**Micron**

- DRAM, DDR3L, 2 Gbit, 128M x 16bit, 800 MHz, FBGA, 96 Pins

**10% OFF****¥ 74.08**产品编号  
**367718206**

## HAND DIGITAL MULTIMETER, TRUE RMS, 10A

**TRIPLETT**

- MM525 is a 6000 count high performance digital multimeter with True RMS readings to provide better accuracy when measuring non-sinusoidal or noisy waveforms.
- Low battery indicator and auto power off

**20% OFF****¥ 1,101.77**产品编号  
**378063706**

## SMD FUSE, FAST ACTING, 40A, 250V, 4818

**Littelfuse**

- Fuse, Surface Mount, 40 A, Fast Acting, 250 V, 80 V, 4818 (12.1mm x 4.5mm), NANO2 456SDE Series

**20% OFF****¥ 30.39**产品编号  
**378122806**

## INDUCTOR, 220UH, SHIELDED, 32A

**VISHAY**

- Power Inductor (SMD), 220  $\mu$ H, 32 A, Shielded, 43 A, 8.64mm x 8.18mm x 3mm

**20% OFF****¥ 8.16**产品编号  
**378002506**

## REDUNDANCY MODULE, POWER SUPPLY UNIT

**Weidmüller**

- Redundancy Module, Weidmuller Power Supply Units
- PRO RM 10 redundancy module
- Push in connection

**5% OFF****¥ 1,576.67**产品编号  
**378799206**

## SCRWDRVR SET, VDE INSULATED

**Wera**

- Screwdriver Set, VDE Insulated, 2 Pieces

**5% OFF****¥ 138.05**产品编号  
**380429206**

## UV MOD, 12 CHIP, 275NM, STRIP PCB, 5.4W

**ILS  
INTELLIGENT LED SOLUTIONS**

- UV Module, 12 Chip, 275 nm, Strip PCB, M3 - Heatsink Mount, 5.4W, Push-In Connector

**3% OFF****¥ 627.45**产品编号  
**378240406**

## TRANS, IGBT, 1.2KV, 80A, 487W, TO-247

**power**

- IGBT, 80 A, 1.75 V, 487 W, 1.2 kV, TO-247, 3 Pins

**10% OFF****¥ 30.99**产品编号  
**379024006**


## ENET CABLE, RJ45 PLUG-PLUG, CAT6A, 7M

**HARTING**

- Ethernet Cable, Cat6A, 7 m, 23 ft, RJ45 Plug to RJ45 Plug, Yellow, RJ Industrial Series

**¥ 511.41**产品编号  
**384720706**人民币(元) | 目录商品参考标价  
为目录商品  
价格货币单位  
**不含税**

## TEST POINT, PCB, THROUGH HOLE

**KEYSTONE**

- PCB Test Point, Through Hole Mount, Brass, Tin Plated Contacts

**¥ 1.08**产品编号  
**378192406**

## LIGHT PIPE, CLR, 1.906", PRESS FIT/PANEL

**BIVAR**

- Light Pipe, 1.906 ", 1 Pipes, Circular, Press Fit, Panel, Transparent, RHD Series

20% OFF

**¥ 40.91**产品编号  
**382386806**

## ROCKER SW, DPST, 16A, 250VAC, PANEL

arcolectric



- Rocker Switch, On-Off, DPST, Illuminated, Panel Mount, Black, 1350 Series

10% OFF

**¥ 52.42**产品编号  
**378086506**

## POWER SUPPLY, AC-DC, 24V, 8.8A

DELTA



- AC/DC Enclosed Power Supply (PSU), ITE, Household & Transformers, 1 Outputs, 211.2 W, 24 V, 8.8 A

5% OFF

**¥ 174.86**产品编号  
**379448506**

## SAFETY RELAY, SPST, 24VDC, 6A, THT

**Panasonic**

- Safety Relay, 24 VDC, SPST-NO, SPST-NC, SF-M, Through Hole, 6 A, PC Pin

5% OFF

**¥ 215.68**产品编号  
**381699706**

## PTC THERMISTOR, AEC-Q200, 1KOHM, TH

Vishay

The DNA of Tech



- PTC Thermistor, 1 kohm, AEC-Q200, Through Hole, PTCEL Series, ICL and Load-Dump Resistor

20% OFF

**¥ 17.13**产品编号  
**378084706**

## CABLE ASSEMBLY, 4POS RCPT-RCPT, 75MM

 TE  
AUTHORIZED DISTRIBUTOR

- Cable Assembly, Wire to Board Receptacle to Wire to Board Receptacle, 4 Positions, 2.54 mm, 1 Row

**¥ 56.92**产品编号  
**384717906**

## JUMPER WIRES, MULTI-COLORED, 30CM, 24AWG

 Twin Industries  
Electronic Hardware Prototyping Tools

- Jumper Wires Set, 10 Pc, 30 cm, Multi-Color, Female to Female, Machine Pin, 24 AWG
- Multicolour machine pin jumper wires are designed for easy insertion and extraction in Twin Industries solderless breadboards
- 24AWG wire

20% OFF

**¥ 78.01**产品编号  
**378070006**

## POWER MOSFET, 100V, 99A, TO-220AB

DIODES INCORPORATED



- Power MOSFET, N Channel, 100 V, 99 A, 0.0072 ohm, TO-220AB, Through Hole

20% OFF

**¥ 10.06**产品编号  
**382843606**

## RF CABLE, SMA PLUG-PLUG, 6", 50 OHM

Amphenol MICROWAVE



- RF / Coaxial Cable Assembly, SMA Plug to SMA Plug, T-Flex 405, 50 ohm, 6 ", 152.4 mm, Blue

5% OFF

**¥ 986.61**产品编号  
**379250606**

5% OFF

**¥ 2,943.17**产品编号  
**378116406**

## MULTILAYER INDUCTOR, 18NH, 0.3A, 0603

 WE  
WORTH ELECTRONIC


- Multilayer Inductor, 18 nH, 0.35 ohm, 2 GHz, 300 mA, 0603 [1608 Metric], WE-MK

21% OFF

**¥ 0.50**产品编号  
**378111506**

## POWER MONITOR, 2 CH, -40 TO 125DEG C

MICROCHIP



- Power Monitor, Accumulator, 2.7 V to 5.5 V Supply, VQFN-16, -40 °C to 125 °C

5% OFF

**¥ 10.63**产品编号  
**381858706**

## FULL FACEPIECE RESPIRATOR, LARGE-SIZE

3M Science. Applied to Life.



- Fiber Optic Connector, SC, Multimode, 125μm, Plastic Body

**¥ 4,033.10**产品编号  
**378388506**

## NTC THERMISTOR, 10KOHM, WIRE LEADED

Amphenol Sensors



- NTC Thermistor, 10 kohm, Through Hole, 3969 K, DC95 Series

20% OFF

**¥ 36.02**产品编号  
**378330106**

## ABSOLUTE ENCODER, MECHANICAL, 6MM

PEPPERL+FUCHS



- Rotary Encoder, Mechanical, Absolute, 0 Detents, Horizontal, Without Push Switch

人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 不含税

本册产品的折扣优惠参照 2022 年 2 月 e 络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税), 该订单即可享受免费送货服务

# 独家销售品牌

e络盟的独家销售品牌以极具竞争力的价格为您提供广泛的高性能产品选择。  
所有产品均符合 ISO/AS 品质标准。

欢迎在线浏览相关产品：

[cn.element14.com/eselect05\\_multicomp\\_pro](http://cn.element14.com/eselect05_multicomp_pro)



DIODE, SCHOTTKY, 1A, 40V, **multicomp<sup>PRO</sup>**  
SOD-123



- Schottky Rectifier, 40 V, 1 A, Single, SOD-123, 2 Pins, 750 mV
- The IN5819HW-7-F is a Schottky Barrier Diode features low stored charge and majority carrier conduction
- Extremely low forward voltage

21% OFF

¥ 0.41

产品编号  
**230645906**

D SUB COVER, ZINC ALLOY **multicomp<sup>PRO</sup>**



- D Sub Backshell, DE, 90°, Zinc Alloy Body
- Multicomp products are rated 4.6 out of 5 stars
- Low profile right angled D-sub cover for 9-pin D-sub connector

20% OFF

¥ 39.38

产品编号  
**211251106**

CRYSTAL, 16MHZ, 18PF,  
HC49-US, SMD **multicomp<sup>PRO</sup>**



- Crystal, 16 MHz, SMD, 11.4mm x 4.7mm, 30 ppm, 18 pF, 30 ppm, MCRSD
- The MCRSD16000F18-3000RR is a 11.4 x 4.7mm SMD Crystal Resonator with AT-FUND oscillation mode.
- Ageing ±3ppm Per Year Max

20% OFF

¥ 1.52

产品编号  
**239595806**

CAP, 0.1μF, 25V, 10%, X7R,  
0805 **multicomp<sup>PRO</sup>**



- SMD Multilayer Ceramic Capacitor, 0.1 μF, 25 V, 0805 [2012 Metric], ± 10%, X7R
- The Multicomp Pro MC series is general purpose MLCC capacitors with X7R dielectric material which provides high electrical precision, stability and reliability
- Small size with higher capacitance values

51% OFF

¥ 0.30

产品编号  
**175916606**

SOCKET, D, PCB, R/A, 15WAY **multicomp<sup>PRO</sup>**



- D Sub Connector, Standard, Receptacle, 8LC, 15 Contacts, DA, Solder
- PCB mount right angle
- PCB mount right angle D-sub female connector

20% OFF

¥ 9.37

产品编号  
**109929506**

CAP, 0.01μF, 50V, 5%, X7R,  
0805 **multicomp<sup>PRO</sup>**



- SMD Multilayer Ceramic Capacitor, 10000 pF, 50 V, 0805 [2012 Metric], ± 5%, X7R
- This product is a SMD Multilayer Ceramic Capacitor with X7R dielectric and 0805 case.
- High capacitance

50% OFF

¥ 0.60

产品编号  
**232083806**

FERRITE CORE, SPLIT, 6.5MM, **multicomp<sup>PRO</sup>**  
220 OHM



- Split Core Ferrite, 6.5 mm, 10 MHz, 300 MHz, 220 ohm
- Hinged ferrite core
- Black colour nylon 66 case

20% OFF

¥ 10.18

产品编号  
**964044406**

DIODE, RECTIFIER, 1A, 60V,  
DO-214AC **multicomp<sup>PRO</sup>**




- Schottky Rectifier, 60 V, 1 A, Single, DO-214AC (SMA), 2 Pins, 750 mV
- The SS16 is a controlled Avalanche power Rectifier Diode with solder plated terminals, moulded plastic case and indicated by cathode band polarity
- Low forward voltage drop

50% OFF

¥ 0.62

产品编号  
**210119006**

HEADER, 2 ROW, VERT, 8WAY **multicomp<sup>PRO</sup>**



- Pin Header, Board-to-Board, 2.54 mm, 2 Rows, 8 Contacts, Through Hole Straight, 2213S
- The 2213S-08G is a 8-way 2-row Straight Header features vertical orientation, solder contact termination, black high temperature plastic insulator and gold-plated copper alloy contacts

4% OFF

¥ 0.16

产品编号  
**159344106**

DIODE, STANDARD  
RECOVERY, 1A, 1KV, DO-41 **multicomp<sup>PRO</sup>**



- Standard Recovery Diode, 1 KV, 1 A, Single, 1V, 30 A
- The IN4007-T is a Plastic Silicon Rectifier with axial leaded terminals and an UL94V-0 molded plastic case. Solderable terminals as per MIL-STD-202, method 208 standard. Color band denotes cathode end polarity.
- Diffused junction

22% OFF

¥ 0.16

产品编号  
**230635706**

CAP, 0.1μF, 50V, 10%, X7R,  
0805 **multicomp<sup>PRO</sup>**



- SMD Multilayer Ceramic Capacitor, 0.1 μF, 50 V, 0805 [2012 Metric], ± 10%, X7R
- The Multicomp Pro MC series is general purpose MLCC capacitors with X7R dielectric material which provides high electrical precision, stability and reliability

50% OFF

¥ 0.34

产品编号  
**175926506**

FERRITE BEAD, 0.0006OHM, **multicomp<sup>PRO</sup>**  
5A



- Ferrite Bead, 49 ohm, 5 A, 23NB, 600 uH
- The 23NB 423226 is a surface-mount Ferrite Bead Inductor suitable for use with the filtering circuits in digital equipment.
- 3 x 3 Solder pad

30% OFF

¥ 1.57

产品编号  
**926526006**

**DIODE, SCHOTTKY, 2A, 60V, DO-214AC-2** **multicomp<sub>PRO</sub>**



- Schottky Rectifier, 60 V, 2 A, Single, DO-214AC (SMA), 2 Pins, 700 mV
- The B260A-13-F is a Schottky Barrier Rectifier with solder-plated terminals and a molded plastic case.
- Built-in strain relief

**50% OFF****¥ 1.09**产品编号  
**230611206**

**FERRULE, 16AWG, 14MM, NYLON, RED, PK100**



- Wire Ferrule, Single Wire, 16 AWG, 1.5 mm<sup>2</sup>, 8 mm, Red, E
- The E1508-RED from Multicomp Pro is an insulated cable ferrule
- Wire size is 16AWG / 1.5mm<sup>2</sup>

**20% OFF****¥ 15.02**产品编号  
**997230706**


**SOCKET, D, PCB, R/A, 9WAY**



- D Sub Connector, Standard, Receptacle, 8LC, 9 Contacts, DE, Solder
- The 8LCM009S-304B-XX from Multicomp Pro is a D sub PCB right angle socket with 9 positions
- 15mΩ Maximum contact resistance

**20% OFF****¥ 7.86**产品编号  
**109929406**

**CAP, 100µF, 63V, 20%**



- Electrolytic Capacitor, 100 µF, 63 V, ± 20%, Radial Leaded, 2000 hours @ 85°C, Polar
- The Multicomp Pro MCGPR series capacitors are general purpose,

radial leaded polarized aluminium electrolytic capacitors  
Capacitance value ranges from 0.1µF to 22000µF for 6.3VDC to 100VDC

**30% OFF****¥ 1.51**产品编号  
**945151006**

**CRIMP TERMINAL, FORK, 4MM, BLUE, PK100**



- Fork / Spade Tongue Terminal, SVE, 16AWG to 14AWG, 2.5 mm<sup>2</sup>, M4, #8, Vinyl
- It has crimp termination and it accepts 16 to 14AWG wire gauge.
- 600V at 75°C Maximum voltage

**20% OFF****¥ 43.20**产品编号  
**997176906**

**INDUCTOR, 1812, 10UH, FERRITE**



**multicomp<sub>PRO</sub>**

- Wirewound Inductor, 10 µH, 1.6 ohm, 20 MHz, 250 mA, 1812 [4532 Metric], MCFT
- Multicomp Pro products are rated 4.6 out of 5 stars
- 12 month limited warranty \*view Terms & Conditions for details

**30% OFF****¥ 1.29**产品编号  
**171193106**

**BUZZER, PIEZO, 4KHZ, 90DB, 16VDC**



**multicomp<sub>PRO</sub>**

产品编号  
**171193106**

- Transducer, Buzzer, 3 V, 16 VDC, 7 mA, 80 dB
- This ABI-001-RC piezo indicator is a Through Hole Type.
- 12VDC piezo buzzer with PCB pins

**50% OFF****¥ 1.53**产品编号  
**175943106**

**LED, 0805, GREEN, 11MCD, 572NM**



**multicomp<sub>PRO</sub>**

- LED, Green, SMD, 0805 [2012 Metric], 20 mA, 2.6 V, 572 nm
- The 703-0104 is a SMD Chip LED with white diffused lens, made of GaP chip.
- 78mW Power dissipation

**20% OFF****¥ 0.57**产品编号  
**211211606**

**LED INDICATOR, 3MM, GREEN**



**multicomp<sub>PRO</sub>**

- LED Panel Mount Indicator, Green, 2.6V, 6mm Fixing Hole, 45mA, 34mcd
- The MC19030001 is a 3mm panel-mount recessed green LED Indicator in high quality bright chrome plated brass housings

**20% OFF****¥ 16.26**产品编号  
**110523006**

**FUSE, TIME DELAY, 2A, 250VAC, AXIAL**



**multicomp<sub>PRO</sub>**

- Fuse, PCB Leaded, 2 A, 250 V, Time Delay, Axial Leaded

**20% OFF****¥ 0.83**产品编号  
**328509506**

**CAP, 10µF, 35V, 20%**




**multicomp<sub>PRO</sub>**

- Electrolytic Capacitor, 10 µF, 35 V, ± 20%, Radial Leaded, 1000 hours @ 105°C, Polar
- The MCUMHR series ultra miniature Radial Lead Aluminium Electrolytic Capacitor developed for the demand of smaller and thinner electronic equipment

**20% OFF****¥ 0.40**产品编号  
**945238906**

**DIP SWITCH, 8 POS, R/A., SPST-NO, SLIDE**



**multicomp<sub>PRO</sub>**



- DIP / SIP Switch, 8 Circuits, Slide, Through Hole, SPST-NO, 24 V, 25 mA
- It has a contact rating 25mA , 50V DC (Switching) and a 100mA 50V DC (Non-Switching)

**20% OFF****¥ 9.17**产品编号  
**286429906**

**人民币(元) | 自录商品参考标价**  
为自录商品  
价格货币单位  
**不含税**

本册产品的折扣优惠参照 2022 年 2 月 e络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税), 该订单即可享受免费送货服务

HEADER, 2 ROW, VERT,  
20WAY

20% OFF

¥ 1.02

multicomp<sup>PRO</sup>CONNECTOR, D SUB, PLUG,  
THT, R/A, 9WAYmulticomp<sup>PRO</sup>

HEADER, 1 ROW, VERT, 4WAY

multicomp<sup>PRO</sup>

- Pin Header, Board-to-Board, 2.54 mm, 2 Rows, 20 Contacts, Through Hole Straight, 2213S
- Rated current is 3A and rated voltage is 600V
- 2.54mm pitch, dual row, straight PCB through hole header

产品编号  
159344606产品编号  
184836806

22% OFF

¥ 0.20

SOCKET, D, T&amp;D, 9WAY

multicomp<sup>PRO</sup>

HEADER, 1 ROW, VERT, 3WAY

multicomp<sup>PRO</sup>

- D Sub Connector, Receptacle, Formed Contacts Series, 9 Contacts, DE, Solder Cup
- The 698106 from Multicomp Pro is an EMI/RFI shielded D sub socket connector with 9 positions

产品编号  
109905206产品编号  
159341206

20% OFF

¥ 2.90

21% OFF

21% OFF

¥ 0.15

20% OFF


¥ 3.52

产品编号  
159341306产品编号  
108467906multicomp<sup>PRO</sup>

The Engineer's Choice

# 高品质连接器与 线缆配件

来自独家销售品牌  
**Multicomp Pro**

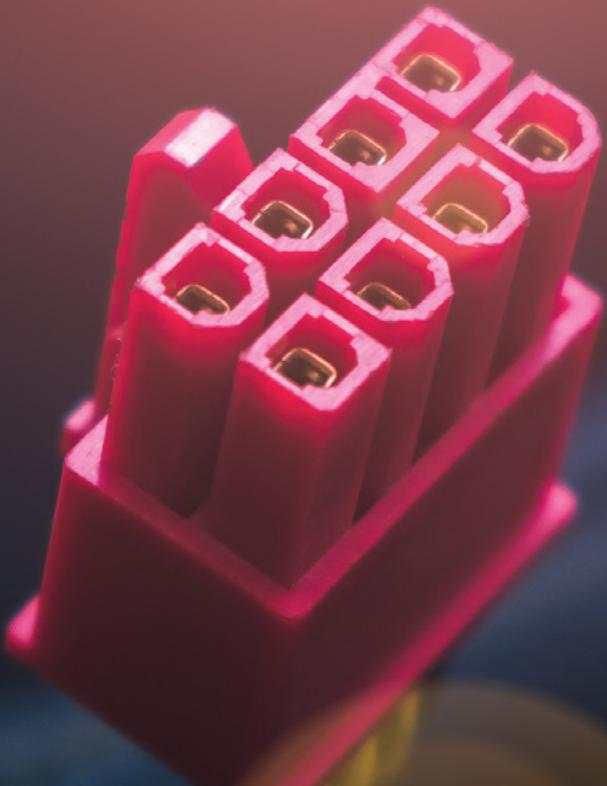

了解更多

cn.element14.com/multicomp-pro-connectors-cable-assemblies

# 半导体

e络盟拥有各类嵌入式以及模拟半导体产品，我们与全球前沿半导体厂商合作，为您的项目提供全方位的支持。

欢迎在线浏览相关产品：

[cn.element14.com/e-select05\\_semiconductors](http://cn.element14.com/e-select05_semiconductors)

## ICD/PROGRAMMER, FOR STM8, STM32



3% OFF

¥ 171.42

## LED, 0603, B GREEN, 40MCD, 570NM



- LED, Green, SMD, 0603 [1608 Metric], 30 mA, 2 V, 570 nm
- Luminaires in operation could harm human vision or skin on a photo-biological level, therefore direct light impact has to be avoided.
- Low energy consumption

产品编号  
**189252306**

10% OFF

¥ 0.82

## DIODE, PWR RECT, 1A, 400V, DO-41



- Standard Recovery Diode, 400 V, 1 A, Single, 1.1 V, 30 A
- The diffused junction rectifier is suitable for general purpose and low-power applications.
- Cathode indicated by polarity band

产品编号  
**165108406**

50% OFF

¥ 1.45

## DIODE, SCHOTTKY, 1A, 200V, POWERDI123



- Schottky Rectifier, POWERDI®, 200 V, 1 A, Single, PowerDI 123, 2 Pins, 850 mV
- The DFLS1200-7 is a high voltage Schottky barrier Rectifier Diode Matte with guard ring die construction for transient protection, tin annealed over copper lead-frame terminals

产品编号  
**171389006**

50% OFF

¥ 2.61

人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 不含税

## DIODE, SWITCH, 300MA, 100V,SOD123



50% OFF  
¥ 0.79

## DEV BOARD, 32BIT ARM CORTEX-M33



产品编号  
**177639206**

¥ 299.66

## DEBUGGER/PROGRAMMER, STM8, STM32 MCU



产品编号  
**299243306**

50% OFF  
¥ 0.65

## DIODE, ULTRAFAST, 300MA, 100V, DO-204AH



产品编号  
**231886506**

50% OFF  
¥ 0.37

产品编号  
**232248506**

本册产品的折扣优惠参照 2022 年 2 月 e络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税)，该订单即可享受免费送货服务

## DEV KIT, BLUETOOTH LOW ENERGY, SOC



- Development Kit, nRF52840 Bluetooth SoC, ANT/ANT+, Arduino Compatible, Segger J-link
- The nRF52840 DK is a versatile single board development kit for Bluetooth Low Energy, Bluetooth mesh, Thread, Zigbee, 802.15.4, ANT and 2.4 GHz proprietary applications on the nRF52840 SoC.
- nRF52840 flash-based ANT™/ANT+™, Bluetooth®

¥ 334.69

产品编号  
**284232106**

## DIODE, SCHOTTY, DUAL, 30V, 0.2A, SOT23



- Small Signal Schottky Diode, Dual Series, 30 V, 200 mA, 800 mV, 600 mA, 150 °C
- The BAT54 series from NXP are surface mount planar schottky barrier diode in SOT-23 package.
- Low capacitance

50% OFF

¥ 0.65

产品编号  
**108119406**

## DEV KIT, BLUETOOTH LOW ENERGY, SOC



- Development Kit, nRF52832/nRF52810, Bluetooth Low Energy, SoC, Bluetooth mesh
- nRF52 DK is a versatile single board development kit for Bluetooth 5, Bluetooth mesh, NFC, ANT and 2.4GHz applications on nRF52810 and nRF52832 SoCs.
- Powered by USB and includes CR2032 battery holder, enabling in-field testing of prototypes

¥ 265.07

产品编号  
**284231906**

## DIODE, TVS




- TVS Diode, RailClamp, Unidirectional, 5 V, 15 V, SLP2510P8, 10 Pins
- The RCLAMP0524P TCT is an ultra low capacitance TVS Array, designed to protect high speed data interfaces.
- Flow-through design


20% OFF

¥ 5.82

产品编号  
**165164506**

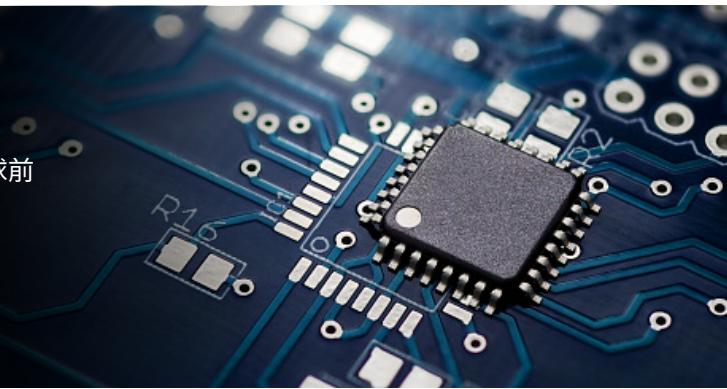

## 50V NON-SYNCHRONOUS BUCK VOLTAGE REGULATOR



10% OFF

¥ 12.24

## DIODE, TVS, 15V, 400W, BI, 5%, SMA

- DC-DC Switching Buck (Step Down) Regulator, Adjustable, 4.4V-50Vin, 2V-24Vout, 500mAout, SOT-23-6
- The MCP16331T-E/CH is a highly integrated high-efficiency fixed frequency step-down DC-DC Converter operates from input voltage sources up to 50V



30% OFF

¥ 2.00

产品编号 189944606

## LED, 0603, RED, 250MCD, 625NM



10% OFF

¥ 0.84

产品编号 232207106

## DIODE, DUAL, 215MA, 100V, SOT-23



- Small Signal Diode, Dual Series, 100 V, 215 mA, 1.25 V, 4 ns, 4 A
- The BAV99 series from NXP are surface mount high speed switching diode.
- Maximum repetitive reverse voltage of 100V

31% OFF

¥ 0.30

产品编号 108121106

## KIT, CODEWORRIOR, TAP, USB, ETH



- Debugger, CodeWarrior TAP Probe, NXP Target System Debugging via Standard Debug Port
- The CodeWarrior TAP enables NXP target system debugging via a standard debug port (usually JTAG) while connected to a developer's workstation via Ethernet or USB.
- Supports the Power Architecture, StarCore, and ColdFire™ processors

¥ 3,350.03

产品编号 227994906

## DC/DC CONV, BUCK, 370KHZ, SOIC-8



20% OFF

¥ 16.91

产品编号 243250406

- Buck (Step Down) Switching Regulator, Fixed, 4.75V-45V In, 5V And 1.8A Out, SOIC-8
- It is suited for use in industrial applications featuring protection functions such as current limitation and over temperature shutdown
- Integrated power transistor

3% OFF

¥ 0.78

产品编号 232207506

## DIODE, SWITCHING, 100V, SOD-123



- Small Signal Diode, Single, 100 V, 150 mA, 1.2 V, 4 ns, 2 A
- The 1N4148W-E3-08 is a small signal fast Switching Diode.
- 350mW Power Dissipation

50% OFF

¥ 0.86

产品编号 243335306

## IN-CIRCUIT DEBUGGER, PIC/ DSPIC, 300MHZ



¥ 2,095.48

产品编号 277812306

- Debugger, MPLAB ICD 4, For PIC® Microcontrollers (MCUs) and dsPIC® Digital Signal Controllers
- It debugs and programs with the powerful and easy-to-use graphical user interface of MPLAB X Integrated Development Environment (IDE).
- Connects to computer via high-speed USB 2.0 (480 Mb/s) cable

## DEV BOARD, STM32F429ZI ADVANCED LINE MCU



- Discovery Board, STM32F429ZI MCU, 2.4" QVGA LCD, 3-axis MEMS Motion Sensor
- The STM32F429 Discovery kit (32F429IDISCOVERY) allows users to easily develop applications with the STM32F429 high-performance MCUs with ARM® Cortex®-M4 core

产品编号 250692406

## LED DISPLAY, 0.52", RED, CA



20% OFF

¥ 8.48

产品编号 116859706

## DEV BOARD, USB CONTROLLER

Strengthening the link between the real and the digital world



- Development Board, CYUSB301x USB Control, ARM9 core with 512KB of RAM, 8 USB 3.0, GPIO II
- The CYUSB3KIT-003 FX3 SuperSpeed explorer kit is an easy to use and inexpensive development platform enabling developers to add USB 3.0 device functionality to any system

产品编号 244847106

¥ 312.59

## V REG, LDO +3.3V 250MA, SOT-23-3



- Fixed LDO Voltage Regulator, 2.3V to 6V, 178mV Dropout, 3.3Vout, 250mAout, SOT-23-3
- The low dropout voltage combined with the low current consumption of only 1.6µA makes this part ideal for battery operation
- Extremely low operating current for longer battery life

20% OFF

¥ 3.13

产品编号 129659206

## DIODE, BIDIR TVS, 2 LINE, 7V&amp;12V, SOT23



- TVS Diode, CDSOT23, Bidirectional, 12 V, 26 V, SOT-23, 3 Pins
- The CDSOT23-SM12 is a surface mount TVS Diode, provides ESD, EFT and surge protection for data ports meeting IEC 61000-4-2 (ESD), IEC 61000-4-4 (EFT) and IEC 61000-4-5 (surge) requirements


产品编号 182486906

30% OFF  
¥ 9.70人民币(元) | 目录商品参考标价  
为目录商品  
价格货币单位 | 不含税



NOW PART OF  
**ANALOG  
DEVICES**

从传感器平台,到嵌入式安全、电能管理、接口、通信等领域的IC解决方案,我们的技术推动设计不断创新。

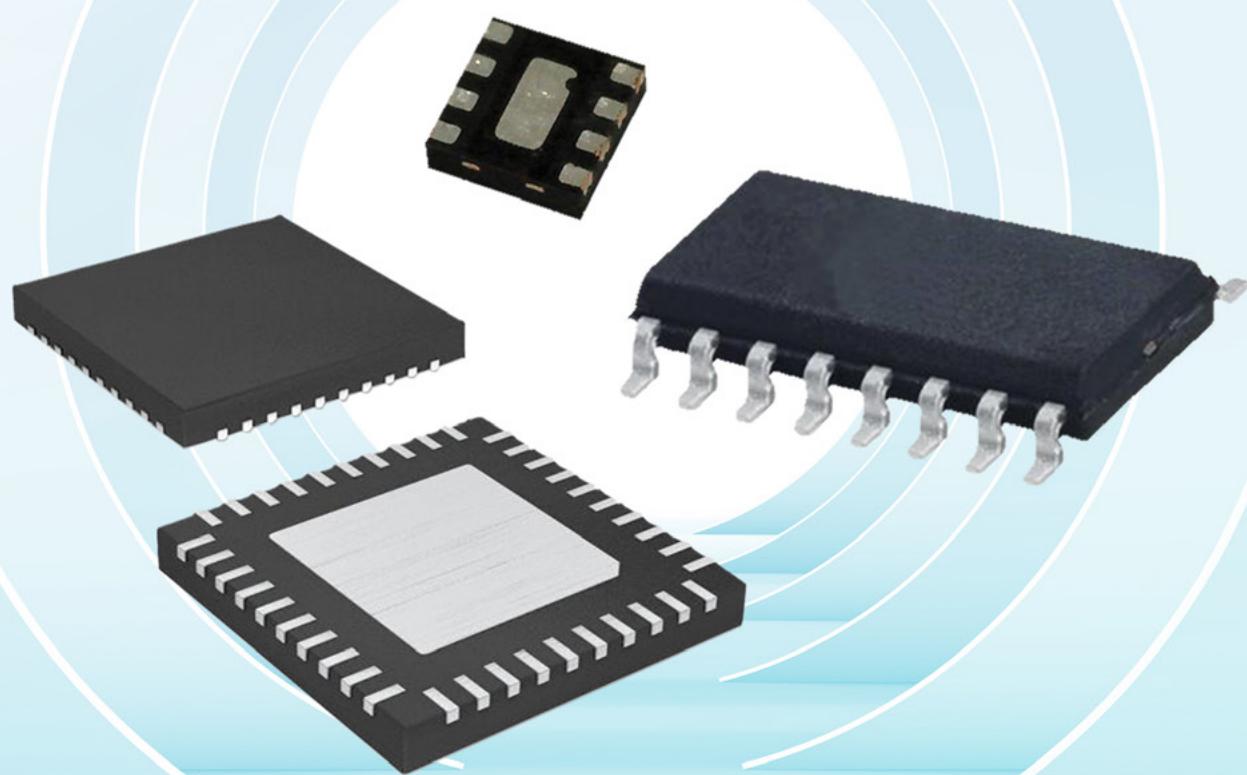

e络盟是 Maxim Integrated  
产品的全球分销合作伙伴。

## ADAPTOR, USB, DEBUG, FOR C8051FXX



SILICON LABS

- USB Debug Adapter, 8-Bit, Interface Between PC's USB Port & Target Device's Debug
- The attached 10 pin debug ribbon cable connects the adapter to the target board and the

¥ 320.92

产品编号  
118694306

## DIODE, SMF GP 1A 1000V

TAIWAN SEMICONDUCTOR




- Standard Recovery Diode, 1 kV, 1 A, Single, 1.1 V, 1.8  $\mu$ s, 30 A
- The Six series from Taiwan Semiconductor are surface mount general purpose rectifier in Sub SMA package.
- UL 94V-0 certified

¥ 0.339

产品编号  
155915506

## IC, HIGH SIDE POWER SWITCH, SOT223-4

Infineon



- Smart Power Switch, SiPMOS Technology, High Side, 1 Output, 1.1A, SOT-223-4
- The BTS4141N is a N-channel high-side vertical power FET Switch with charge pump and monolithically integrated in smart SiPMOS® technology.
- Overload protection

20% OFF

¥ 13.79

产品编号  
221547706

## CAN MODULE, USB, LEAF LIGHT V2, 1CH

KVASER  
Advanced CAN Solutions

- Computer Interface, Leaf Light HS v2, 1 CH, CAN Bus Interface, USB-9Pin DSub Connector, Automotive
- The 00685-0 Kvaser Leaf Light HS V2 is a high speed USB to CAN interface module.
- 8000 messages transmitted per second

10% OFF

¥ 2,154.59

产品编号  
240035506

## DIGITAL POT, 200K, SINGLE, TDFN-8

maxim integrated ANALOG DEVICES



- Non Volatile Digital Potentiometer, 200 kohm, Single, SPI, Linear,  $\pm 25\%$ , 2.7 V
- The MAX5424ETA+T from Maxim Integrated Products is a 256 tap, non-volatile, SPI interface, digital potentiometer in 8 pin TDFN package.
- Supply voltage range from 2.7V to 5.25V

10% OFF

¥ 21.03

产品编号  
279912906

## DIODE, SCHOTTKY, 40V, 2A, SMA

DIODES INCORPORATED



- Schottky Rectifier, 40 V, 2 A, Single, DO-214AC (SMA), 2 Pins, 500 mV
- The B240A-13-F is a surface mount Schottky Barrier Rectifier Diode with moulded plastic case.
- Guard Ring Die Construction for Transient Protection

50% OFF

¥ 1.65

产品编号  
184366906

## IC, USB TO UART, SMD, 28SSOP

FTDI Chip



- Interface Bridge, USB to UART, 1.8 V, 5.25 V, SSOP, 28 Pins, -40 °C, 85 °C
- The FT232R is the latest device to be added to FTDI's range of USB UART interface Integrated Circuit Devices.
- Single chip USB to asynchronous serial data transfer interface

20% OFF

¥ 35.26

产品编号  
114603206

## CAN TRANSCEIVER, 2MBPS, 5.5V, SOIC-14

MICROCHIP



- CAN Bus, CAN, SPI, 2.7 V, 5.5 V, SOIC
- The MCP2517FD is a small-footprint External CAN FD Controller that can be easily added to a microcontroller with an available SPI interface.
- Conforms to ISO11898-1:2015

10% OFF

¥ 18.23

产品编号  
280615806

## EVALUATION BOARD, XPLAINED ULTRA

MICROCHIP



- Evaluation Board, SAM V71/V70/S70/E70 MCUs, Xplained Ultra, Mechanical Buttons
- SAM V71 Xplained ultra EVK ideal for evaluating and prototyping with the SAM V71, SAM V70, SAM S70 and SAM E70 ARM® Cortex®-M7 based microcontrollers.
- MediaLB connector

¥ 1,688.99

产品编号  
246825906

## IC, 12 BIT DAC, 5.5V, SOT-23-6

MICROCHIP



- Digital to Analogue Converter, 12 bit, I2C, Serial, 2.7 V to 5.5 V, SOT-23, 6 Pins
- The MCP4725A0T-E/CH is a single channel, buffered voltage output 12bit digital to analogue converter (DAC) with EEPROM memory in 6 pin SOT-23 package.
- $\pm 0.2$  LSB DNL

10% OFF

¥ 8.95

产品编号  
157844906

## DRIVER, LED, 8X7SEG/64, 10MHZ, 24DIP

maxim integrated ANALOG DEVICES



- LED Driver, 4V to 5.5V input, 16 Outputs, 10 MHz Switch Frequency, 320 mA out, DIP-24

3% OFF

¥ 57.75

产品编号  
251919406

## DIODE, ZENER, 1.3 W, 5.1V, DO-41

VISHAY  
The DNA of Tech

- Zener Single Diode, 5.1 V, 1.3 W, DO-41 (DO-204AL), 5 %, 2 Pins, 175 °C
- The IN4733A is a silicon planar power Zener Diode for use in stabilizing and clipping circuits with high power rating.
- Standard Zener voltage tolerance is  $\pm 5\%$

50% OFF

¥ 1.09

产品编号  
161236306

## DIODE, PHOTO, 920NM, 50°, TO-5-2

EXCELITAS TECHNOLOGIES



- Photodiode, 50°, 250 pA, 920 nm, TO-5-2
- The VTB5051H is a blue enhanced VTB Process Photodiode designed for spectral response between 320 and 1100nm.


5% OFF

¥ 80.64

产品编号  
136508206

## FANOUT BUFFER, 125MHZ, -40 TO 85DEG C

RENESAS



- Clock IC Type: Zero Delay Buffer. Frequency level is 125MHz
- No. of Outputs is 6 Outputs
- Supply Voltage is 3.135V - 3.465V

20% OFF

¥ 26.33

产品编号  
326296606

## DIODE, TVS, 36V, 600W, BI, 5%, SMB

BOURNS'



- TVS Diode, Transil SMBJ, Bidirectional, 36 V, 58.1 V, DO-214AA (SMB), 2 Pins
- The SMBJ series Transient Voltage Suppressor Diode used for surge and ESD protection applications.
- 600W Power dissipation

30% OFF

¥ 2.28

产品编号  
189947106

# IoT应用的解决方案

## 智能、互联、安全

创新的技术解决方案、易于使用的工具  
以及对互联设备安全的保护支持



半球体

### INTEGRATED GRAPHICS & TOUCH (IGAT) CURIOSITY EVAL KIT



hardware platform for evaluating the SAME51J20A microcontroller.

· ATSAME51J20A microcontroller

**¥ 762.05**

产品编号  
**377216906**

### CAN BUS ANALYZER TOOL, CAN 2.0B, ISO11898-2



intended to be a simple to use low cost CAN bus monitor which can be used to develop and debug a high speed CAN network.

· Supports CAN 2.0b and ISO11898-2

**¥ 868.66**

产品编号  
**212865406**

人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 | 不含税

### SAM-IOT WG DEVELOPMENT BOARD



- Development Board, ATSAMD21G18A/ ATECC608A/ ATWINC1510, 32bit, ARM Cortex-M0+ MCU
- SAMD21G18, 32-bit Microcontroller
- SAM-IoT WG development board

**¥ 252.24**

产品编号  
**355918806**

### WI-FI SMART DEVICE ENABLING KIT



- Development Kit, WiFi Smart Device Enablement Kit, Alexa Voice Control, WiFi, IoT
- Wi-Fi® smart device enabling kit is designed to accelerate adding Alexa Voice Control to your existing application, enabling rapid prototyping.
- SAML21MCU pre-programmed with application firmware

**¥ 490.53**

产品编号  
**313017206**

### CAN BUS ANALYZER TOOL, CAN 2.0B



- CAN Bus Analyzer Tool, Supports CAN 2.0b and ISO11898-2, Direct access to CAN H and CAN L
- CAN BUS analyzer tool is a simple to use low cost

CAN bus monitor which can be used to develop and debug a high speed CAN network.

· Supports CAN 2.0b and ISO11898-2

**¥ 925.18**

产品编号  
**1800555606**

### ATSAMA5D27-SOM1-EK1 PROTOTYPING & EVAL PLATFORM



- Development Kit, SAMA5D27 SoM, 1GB RAM, MikroBUS headers for Click Boards
- Fast prototyping and evaluation platform for the SAMA5D2 based SiP package and SAMA5D27-SOM1 (SAMA5D27 System On Module).
- 1x CryptoAuthentication™ device ATECC508 (populated but not provisioned)

**¥ 1,611.90**

产品编号  
**281196906**

本册产品的折扣优惠参照 2022 年 2 月 e络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税),该订单即可享受免费送货服务

更出色的开关特性，更丰富的产品阵容  
实现更紧凑的设计！

# SiC MOSFET

## 产品特点

- 高速开关
- 低导通电阻
- 寄生二极管的反向回复工作特性更佳
- 与IGBT相比，功率损耗大幅降低，开关损耗降低73%

## SCT3系列

- 封装：TO-247/TO-247N/TO-247-4L/TO-263-7L
- 650V / 21A~118A
- 1200V / 10A~95A

## 应用领域

非常适合需要高效率的大型服务器电源、  
UPS系统、太阳能转换器、车载充电器以  
及电动汽车充电桩。

**ROHM**  
SEMICONDUCTOR



了解更多产品详情



ROHM微信公众号

EVALUATION BOARD,  
BATTERY CHARGER

- Evaluation Board, BD71631QWZ, Battery Charger, Power Management - Battery
- BD71631QWZ evaluation board is for evaluating the linear charging IC BD71631QWZ, and charges 4.2V from the

5V input voltage

Used in low voltage battery products and li-ion 1cell battery products

**¥ 853.01**产品编号  
**377876406**SCHOTTKY RECTIFIER, DUAL,  
65V, TO-263S

- Schottky Rectifier, 65 V, 30 A, Dual Common Cathode, TO-263S, 3 Pins, 690 mV



20% OFF

**¥ 11.14**产品编号  
**292472806**MOSFET, DUAL, N / P-CH,  
60V, 6.5A, SOP

- Dual MOSFET, N and P Channel, 60 V, 6.5 A, 0.025 ohm, SOP, Surface Mount



20% OFF

**¥ 11.16**产品编号  
**377816706**EVL BOARD, BD9F500QUZ,  
BUCK CONV

- Evaluation Board, BD9F500QUZ, Power Management, Buck Converter
- BD9F500QUZ-EVK-001 is an evaluation kit for BD9F500QUZ.
- Adjustable soft start

**¥ 275.31**产品编号  
**377006506**EEPROM, AEC-Q100, 128KBIT,  
-40TO125DEG C

- EEPROM, 128 Kbit, 16K x 8bit, Serial I2C (2-Wire), 1 MHz, VSON-X, 8 Pins




20% OFF

**¥ 9.26**产品编号  
**365241006**EVALUATION BOARD,  
PRESSURE SENSOR

- Evaluation Board, BM1390GLV, Pressure Sensor
- Evaluation board for BM1390GLV pressure sensor. BM1390GLV is piezo-resistive pressure sensor

**¥ 251.48**产品编号  
**380476206**LASER DIODE, 30A, 75W,  
905NM, METAL CAN

- Laser Diode, 905 nm, 3 Pins, Metal Can, 75 W

**3% OFF**  
**¥ 449.89**产品编号  
**380171606**AC / DC CONVERTER, -40 TO  
105DEG C

- AC/DC Converter, Flyback, -40 °C to 105 °C, TO263-7L-7
- Long time support product for industrial applications
- Quasi-resonant AC/DC converter built-in 1700V SiC-MOSFET

**20% OFF**  
**¥ 68.20**产品编号  
**377005706**INTELLIGENT POWER  
MODULE, IGBT, 600V/15A

- Intelligent Power Module (IPM), IGBT, 600 V, 15 A, 1.5 kV, HSDIP, DIP1PM
- BM64374S-VA is an intelligent power module composed of gate drivers, bootstrap diodes, IGBTs, fly wheel diodes.
- 3phase DC/AC Inverter

**5% OFF**  
**¥ 100.21**产品编号  
**377005306**CURRENT SENSE RES, OR001,  
1%, 4 W, 3921

- SMD Current Sense Resistor, 0.001 ohm, PSR, 3921 [1052 Metric], 4 W, ± 1%, Metal Strip

**20% OFF**  
**¥ 6.91**产品编号  
**247510706**SCHOTTKY RECTIFIER, 60V,  
30A, TO-263S

- Schottky Rectifier, 60 V, 30 A, Dual Common Cathode, TO-263S, 3 Pins, 670 mV

20% OFF

**¥ 11.07**产品编号  
**340657606**MOSFET, DUAL, N / P-CH,  
40V, 4.5A, TSMT

- Dual MOSFET, N and P Channel, 40 V, 4.5 A, 0.034 ohm, TSMT, Surface Mount

**20% OFF**  
**¥ 3.81**产品编号  
**377817206**DC/DC CONV, BUCK,  
200KHZ, 125DEG C

- DC-DC Switching Buck Regulator, Adjustable, 7V to 76V in, 1V to 73.72V out, 5A out, HTSOP-8, 8Pin

**20% OFF**  
**¥ 35.89**产品编号  
**358684706**DUAL MOSFET, COMPLEMENTARY  
N AND P CHANNEL

- Transistor polarity is complementary N and P channel . Continuous drain current Id is 9A
- Drain source voltage Vds is 30V. On Resistance Rds(on) is 0.0125ohm
- Rds(on) test voltage Vgs is 10V . Transistor mounting type is Surface mount

**30% OFF**  
**¥ 4.80**产品编号  
**270675006**CURRENT SENSE RES, OR1,  
1%, 3 W, 2512

- SMD Current Sense Resistor, 0.1 ohm, GMR, 2512 [6432 Metric], 3 W, ± 1%, Metal Strip

**20% OFF**  
**¥ 6.29**产品编号  
**280833506**人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 不含税

本册产品的折扣优惠参照 2022 年 2 月 e 络盟官网售价制定


\* 网单金额满人民币 200 元(不含增值税), 该订单即可享受免费送货服务

# 连接器

e络盟拥有板级连接器到工业/军用圆形连接器等各类型产品，我们广泛的产品系列为您的项目提供稳定、可靠、安全的连接解决方案。

欢迎在线浏览相关产品：

[cn.element14.com/eselect05\\_connector](http://cn.element14.com/eselect05_connector)

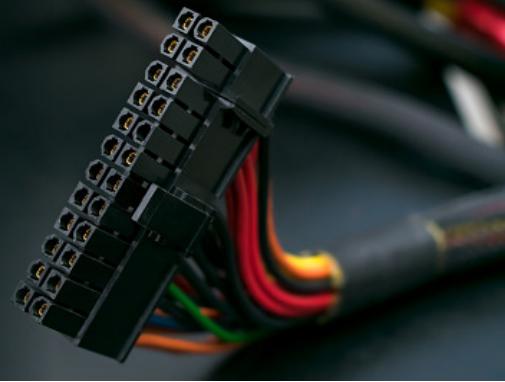

RECEPTACLE, FREE, 4WAY, CRIMP



¥ 1.02

**molex**

- Connector Housing, Dual Row, Micro-Fit 3.0 43025, Receptacle, 4 Ways, 3 mm
- Positive latching
- Fully polarized housings

产品编号  
67289006

CIRCULAR CLAMP, SIZE 14/14S, ALUMINIUM



¥ 20.69

产品编号  
949185606

CONTACT, SOCKET, 28-22AWG, CRIMP



50% OFF

¥ 0.34

**JST**

产品编号  
15162706

- Circular Connector Clamp, 12SL / 14 / 14S, 11.1 mm, Zinc Alloy, 97
- The 97-3057-1007-1 is a Cable Clamp for use with standard cylindrical connector, MS3057A type.
- 3/4-20 Threads

BACKSHELL, D, DIECAST, 9WAY



20% OFF

¥ 29.19

**MH CONNECTOR**

产品编号  
284787006

- D Sub Backshell, Diecast, Rapid Assembly, Shielded, MHDM, DE, 180°, Zinc Body
- The MHDM-9-K from MH Connectors is a 9 position D sub metallized grommet Kit/backshell kit with top cable entry.
- Nickel plated zinc backshell material

产品编号  
430343006

HEADER, TOP ENTRY, 2WAY, 2MM



30% OFF  
¥ 0.81

CONTACT, SOCKET, 30-28AWG, CRIMP



22% OFF  
¥ 0.18

CONTACT, SOCKET, 20AWG, CRIMP



20% OFF  
¥ 0.82

CONTACT, SOCKET, 20AWG, CRIMP



11% OFF  
¥ 0.25

**JST**

产品编号  
949185606

**HRS**

产品编号  
246489006

**molex**

- Pin Header, Wire-to-Board, 2 mm, 1 Rows, 2 Contacts, Through Hole Straight, PH
- The PH series top entry, through hole shrouded header from JST are 2.0mm pitch, single row wire to board disconnect crimp style connectors.
- Current rating of 2A

产品编号  
973219506

CRIMP PINS - TIN/18-16AWG



20% OFF  
¥ 2.83

CONTACT, SOCKET, 18AWG, CRIMP



¥ 25.93

产品编号  
109874906

**molex**

**P**

D SUB CONTACT, PIN, CRIMP, SIZE 16



3% OFF  
¥ 7.18

产品编号  
973219506

产品编号  
347347906

CONTACT, 0.05-0.22MM, CUT REEL



31% OFF  
¥ 0.23

**JST**

The Quality Connection



产品编号  
167124506

## FUSE DRAWER



¥ 7.19

**SCHURTER**  
ELECTRONIC COMPONENTS

- Connector Accessory, Fuse Drawer, DD11, DD12, DD21, DD22, KEA Print, KFA, KMF Power Entry Modules
- The 43011401 from Schurter is a 2 pole fuse drawer for 5mm x 20mm fuse links. It also functions as voltage selector.
- Fingergrip mounting

 产品编号  
**114490606**

## ADAPTOR, RJ45, JACK TO JACK, 8WAY



20% OFF

¥ 127.01

**L-com**  
an INFINITI® brand

- In-Line Adapter, Cat6, Shielded, RJ45, RJ45, Adaptor, In-Line, Jack, 8 Ways
- Designed to work with EIA/TIA 568A and B wiring, this RJ45 coupler offers a reliable method to pass high-speed data communication through a chassis or rack panel

 产品编号  
**229382006**

## IN-LINE ADAPTER, RJ45 8P JACK-JACK

bulgin



- In-Line Adapter, RJ45, RJ45, Adaptor, In-Line, Buccaneer, Jack, 8 Ways
- The PX0833 from Bulgin is a RJ45 panel mountable coupler suitable for Ethernet Buccaneer flex connectors.
- Cat 5e shielded coupler

20% OFF

¥ 400.62

 产品编号  
**966772506**

## CABLE CLAMP, SIZE 23

TE



- Circular Connector Clamp, Straight, 23, 17.86 mm, Thermoplastic, CPC, CPC Plugs & Receptacles
- The 206138-8 from TE Connectivity is a cable clamp kit without cover.
- Straight body style

20% OFF

¥ 41.61

 产品编号  
**120593806**

## CONNECTOR, XLR, PLUG, FREE, 3WAY

NEUTRIK



- XLR Connector, 3 Contacts, Plug, Cable Mount, Silver Plated Contacts, Metal Body, X
- The NC3MX from Neutrik is a 3 pole male XLR cable connector.
- Polyamide (PA 6.6 30 % GR) insert, brass (CuZn39Pb3) contact with silver plating

5% OFF

¥ 26.46

 产品编号  
**30876606**

 人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 不含税

## CONTACT, PIN, 18AWG, CRIMP



31% OFF

¥ 0.477

**molex**

- Contact, Mini-Fit Jr. 5558, Pin, Crimp, 18 AWG, Tin Plated Contacts
- This 5558 series terminal mates with 5556 series Mini-Fit® crimp terminal, suitable for power application.
- Current rating is 9A

 产品编号  
**175664906**

## JACK, SOCKET, DC, 250V, 5A

**Swiftechair CONXALL**  
MADE IN CHINA CONNECTIVITY SOLUTIONS


10% OFF

¥ 9.48

 产品编号  
**160872706**

## D SUB CONTACT, 12AWG, SOLDER, 8AWG

**molex**


- D Sub Contact, Molex D Sub Housing Connectors, Pin, Copper Alloy, Gold Plated Contacts, 8 AWG
- The FMP007P103 is a 40A standard solder

20% OFF

¥ 14.10

 产品编号  
**243322206**

## CONN, VITA 57 FMC, RCPT, 400POS, 10ROW

**samtec**


- Mezzanine Connector, Vita 57 XMC, Array, Female, 1.27 mm, 10 Rows, 400 Contacts, Surface Mount
- The ASP-134486-01 is a 400-pole 10-row 1.27mm Female FMC Connector with gold-plated copper alloy contacts.
- Lead-free solder

¥ 149.85

 产品编号  
**243350106**

## D SUB BACKSHELL, 26POS, 180 DEG

**3M** Science. Applied to Life.


- D Sub Backshell, 103 Series, 180°, Metallised Plastic Body

10% OFF

¥ 75.19

 产品编号  
**339528106**

## CRIMP CONTACT, PIN, 15-18 AWG

 TE  
AUTHORIZED DISTRIBUTOR


- Contact, SUPERSEAL 1.5, Pin, Crimp, 15 AWG, Tin Plated Contacts, Superseal 1.5 Series Connectors
- The sealed contact is suitable for Super-Seal 1.5 series connectors.
- Copper wire

30% OFF

¥ 1.11

 产品编号  
**206032606**

## FEMALE, PRESS FIT, TYPE B19, CL2, 95WAY

**ept**


- Connector, 95 Contacts, 2 mm, Receptacle, Press Fit, 5 Rows
- The 244-23300-15 is a 95-position 5-row B19-type Hardmetric Connector with gold-plated bronze contacts and a glass-filled PBT insulator.
- Robust design

3% OFF

¥ 19.79

 产品编号  
**165630606**

## CONNECTOR, MICRO SD, STANDARD, 8POS, SMT

**HRS**


- Memory Card Connector, MicroSD, Push-Push, 8 Contacts, Copper Alloy, Gold Plated Contacts, DM3
- The DM3AT-SF-PEJM5 is a surface mount microSD Card Connector with small external dimensions and a strong rigid structure.
- Small External Dimensions

20% OFF

¥ 13.60

 产品编号  
**242771906**

## CABLE GLAND, POLYAMID, M25

**LAPP**


- Cable Gland, Skintop® ST-M, IP68, IP69, M25 x 1.5, 10 mm, 17 mm, Nylon (Polyamide), Grey
- The SKINTOP ST-M series from Lapp Kable are cable glands constructed from tough polyamide and offer many advantages over conventional brass glands

20% OFF

¥ 16.62

 产品编号  
**117887106**

## BACKSHELL, D, DIECAST, 15WAY

**MH** CONNECTORS


- D Sub Backshell, Diecast, Rapid Assembly, Shielded, MHMD, DA, 180°, Zinc Body
- The MHMD-15-K from MH Connectors is a 15 position D sub metallized grommet Kit/backshell kit with top cable entry.
- Nickel plated die-cast zinc backshell material

30% OFF

¥ 39.65

 产品编号  
**430344106**

本册产品的折扣优惠参照 2022 年 2 月 e 络盟官网售价制定

\* 网单金额满人民币 200 元 (不含增值税), 该订单即可享受免费送货服务

CONNECTOR, POWER ENTRY,  
JACK, 5A, 20VDC

20% OFF

¥ 5.26

产品编号  
247214906

- DC Power Connector, Jack, 5 A, 2 mm, PCB Mount, Solder
- The 694106301002 is a 5A black through-hole right angle Power Jack, stamped contacts. This WR-DC series power jack with copper alloy contacts, PA66 insulator.
- 24VDC Voltage rating

CONN, VITA 57 FMC, HEADER,  
400POS, 10ROW

- Mezzanine Connector, Vita 57 XMC, Array, Male, 1.27 mm, 10 Rows, 400 Contacts, Surface Mount
- The ASP-134488-01 is a 10-row SEARAY™ VITA 57 Male Connector with gold-plated contact.
- Gold over Nickel-plated Contact

3% OFF

¥ 172.99

产品编号  
243350306

## SOCKET, XLR, NICKEL



- XLR Connector, 3 Contacts, Socket, Cable Mount, Silver Plated Contacts, Metal Body, XX
- The NC3FXX from Neutrik is a 3 pole female XLR cable connector with nickel housing and silver contacts.
- Bronze CuSn6 contacts and polyamide insert

5% OFF

¥ 27.77

产品编号  
999176006CABLE TIE, BLACK, 102MM,  
PK100

- Cable Tie, Nylon 6.6 (Polyamide 6.6), Black, 100 mm, 2.5 mm, 22 mm, 18 lb
- The T18R-W from HellermannTyton are weather resistant black Polyamide 6.6 Cable Ties ideal for routing, bundling and securing of cables, wires, pipes and hoses.
- One-piece non-releasable ties

10% OFF

¥ 17.05

产品编号  
85172306

## CRIMP SOCKET, 20-16AWG



- Circular Connector Contact, Machined, Souriau Trim Trio, Socket, Crimp, 16 AWG, 20 AWG
- The RC16M23K from Souriau is a green colour, size 16 solid machined socket contact for TRIM TRIO connectors.
- Wire size range from 20AWG to 16AWG (0.52mm<sup>2</sup> to 1.5mm<sup>2</sup>)

20% OFF

¥ 5.82

产品编号  
365205106IEC C19 CORD CONNECTOR,  
STRAIGHT, 16A

- IEC Power Connector, IEC C19, IEC C19 Socket, 20 A, 250 VAC, Screw, Cable Mount
- Rewireable, line socket style connector

20% OFF

¥ 61.34

产品编号  
117011406BULKHEAD ADAPTER, BNC  
JACK-BNC JACK

- RF / Coaxial Adapter, BNC, Jack, BNC, Jack, Straight Bulkhead Adapter, 50 ohm
- The 31-220H is a BNC Jack to BNC Jack UG-492A/U pressurized straight RF Adapter with silver-plated beryllium copper contacts.
- Bulkhead mounting

20% OFF

¥ 79.84

产品编号  
182743106DC SOCKET, SMD, DC-10AS,  
2.1MM PIN

- DC Power Connector, Jack, 2 A, 2.1 mm, Surface Mount, Solder
- The FC68148S is a SMD DC Socket for surface mounting assembly, signal processors and power supplies.
- Ø2.1mm Pin (Discrete)

30% OFF

¥ 11.83

产品编号  
188930906CONNECTOR, HEADER,  
10POS, 2ROW, 2.54MM

- Pin Header, Board-to-Board, 2.54 mm, 2 Rows, 10 Contacts, Through Hole, FCI BergStik 67997
- The 67997-410HLF is a 10-contact 2-row black BergStik® Unshrouded Header with vertical orientation.
- 5000MΩ Insulation resistance

10% OFF

¥ 1.40

产品编号  
275137806

## HOUSING, 14WAY, STRAIGHT



- Circular Connector, CPC Series 1, Panel Mount Receptacle, 14 Contacts, Thermoplastic Body
- The CPC-series connector has Keyed mating alignment and threaded coupling.
- UL94-V0 Flammability rating

20% OFF

¥ 24.29

产品编号  
177281906D SUB BACKSHELL, D,  
DIECAST, 25WAY

- D Sub Backshell, Diecast, Rapid Assembly, Shielded, MHDM, DB, 180°, Zinc Body
- The MHDM-25-K is a 25-way full metal D-sub Hood, MHDM series, made of zinc with nickel plated finish.
- Metalized grommet kit and clamp size

30% OFF

¥ 45.54

产品编号  
430345306CIRCULAR CONNECTOR  
PLUG, SIZE 10, 4 POSITION,  
CABLE

- Circular Connector, Trident Ringlock Series, Cable Mount Plug, 4 Contacts
- This Trident Ringlock series plug has nylon body.
- 13A Current rating

20% OFF

¥ 57.20

产品编号  
138760206CONNECTOR, DC POWER,  
PLUG, 4A, 24V

- DC Power Connector, Plug, 3 A, 9.5 mm, Cable Mount, Solder
- The 1633 02 from Lumberg is a straight version power supply plug with solder terminals and bend protection.
- Diameter opening is 5.5mm

20% OFF

¥ 9.68

产品编号  
156839806CONTACT, SOCKET, CRIMP,  
20AWG

- Rectangular Power Contact, SHS, Tin Plated Contacts, Copper, Socket, Crimp
- The 425-00-00-872 is a Female Terminal made of high performance copper based alloy and tin finish

1% OFF

¥ 0.63

产品编号  
275165206SOCKET, D, HIGH DENSITY,  
15WAY

- D Sub Connector, HD15, High Density, Receptacle, High Density D, 15 Contacts, DE, Solder
- The HDE15ST from ITW McMurdo is a high density series 15 position D sub receptacle connector with DE shell size.
- Tinned steel shell for EMI/RFI shielding

20% OFF

¥ 7.43

产品编号  
107181106人民币(元) | 目录商品参考标价  
为目录商品  
价格货币单位 | 不含税



## 数字化趋势促使汽车小型化发展

随着我们成为一个更加数字化的社会，我们梦寐以求的更多小工具将需要能够在车辆中使用，并在车辆网络内无缝通信。这推动了汽车电子产品在各种不断增长的应用中采用更密集的封装。

### AUTOMOTIVE CONN HOUSING, RCPT, 4WAYS



20% OFF

¥ 4.27

**molex**

- Automotive Connector Housing, Polarisation A, Black, Mini50 34791, Receptacle, 4 Ways
- The 34791-0040 is a 4-circuit 1-row Mini50™ Unsealed Non-bridged Receptacle, polarization option A, used with 560023 series CTX50 unsealed terminals

### AUTOMOTIVE CONN HOUSING, PLUG, 6WAYS



20% OFF

¥ 3.74

**molex**

- Automotive Connector Housing, Yellow SIR, Key A, MXP120 34899, Plug, 6 Ways
- The MXP120 34899 series Blade Male Connector Housing made of PA SPS resin with 7mm clip-slot.
- Per ISO3795 or GMW3191 flammability

### CONTACT, SOCKET, 24AWG, CRIMP

9% OFF  
¥ 0.14**molex**

- Contact, DuraClik™, Micro-Latch™, Mi II™, Socket, Crimp, 24 AWG, Tin Plated Contacts

### AUTOMOTIVE HOUSING, CONN, PLUG, 6POS

20% OFF  
¥ 16.67**molex**

- Automotive Connector Housing, MX150 148028, Plug, 6 Ways, Molex MX150 33000 Series Contacts

### AUTOMOTIVE HOUSING, RCPT, 2POS, 10A

20% OFF  
¥ 5.20**molex**

产品编号 305013506

### CONNECTOR HOUSING, RCPT, 2POS

20% OFF  
¥ 9.57**molex**

产品编号 228434306


人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 不含税

本册产品的折扣优惠参照 2022 年 2 月 e络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税),该订单即可享受免费送货服务

# 无源元件

e络盟现货供应来自业界先进制造商的无源元件系列，全面满足原型设计至量产阶段的需求。

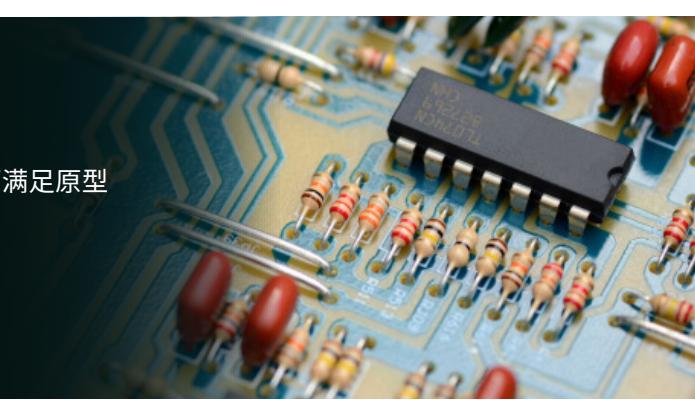

欢迎在线浏览相关产品：

[cn.element14.com/eselect05\\_passive](http://cn.element14.com/eselect05_passive)

THERMISTOR, NTC, 3969K, 10 KOHM

Amphenol Sensors



- NTC Thermistor, 10 kohm, Wire Leaded, -40 °C to 105 °C

20% OFF

¥ 41.04

产品编号  
270653206

CAP, 0.1μF, 50V, 10%, X7R, 0402

**muRata**  
INNOVATOR IN ELECTRONICS



- SMD Multilayer Ceramic Capacitor, 0.1 μF, 50 V, 0402 [1005 Metric], ± 10%, X7R
- Automotive grade multilayer ceramic chip capacitor (MLCC) used for automotive applications such as power train and safety equipment.

31% OFF

¥ 0.33

产品编号  
261187806

CAP, 1μF, 50V, 10%, X5R, 0603

- SMD Multilayer Ceramic Capacitor, 1 μF, 50 V, 0603 [1608 Metric], ± 10%, X5R
- The UMK107BJ105KA-T is a high value Multilayer Ceramic Capacitor with plated end termination, X5R temperature characteristics and 0603 case


30% OFF

¥ 0.62

产品编号  
211285806

CAP, 0.1μF, 25V, 10%, X7R, 0805

**KEMET**  
a YAGEO company



- SMD Multilayer Ceramic Capacitor, 0.1 μF, 25 V, 0805 [2012 Metric], ± 10%, X7R
- KEMET's X7R dielectric features a 125°C maximum operating temperature and is considered "temperature stable."
- Operating temperature range from -55°C to +125°C

30% OFF

¥ 0.57

产品编号  
165086306

CAP, 1000PF, 2 KV, 10%, X7R, 1206

**KEMET**  
a YAGEO company



- SMD Multilayer Ceramic Capacitor, High Voltage, 1000 pF, 2 kV, 1206 [3216 Metric], ± 10%, X7R
- Operating temperature range from -55°C to +125°C

30% OFF

¥ 0.83

产品编号  
157265106

INDUCTOR, 4.7UH, 20%, 1.3A, SHLD, SMD

**Coilcraft**



- Power Inductor (SMD), 4.7 μH, 1.3 A, Shielded, 1.9 A, LPS4018, 3.9mm x 3.9mm x 1.7mm
- The LPS4018 series shielded Power Inductor with ferrite core and matte tin over nickel over silver termination.
- Resistance to soldering heat

20% OFF

¥ 6.18

产品编号  
240810306

CAP, 1μF, 50V, 10%, X7R, 1206



- SMD Multilayer Ceramic Capacitor, 1 μF, 50 V, 1206 [3216 Metric], ± 10%, X7R
- The 1206C105KAT2A is a Multilayer Ceramic Capacitor with Ni/Sn-plated termination, X7R dielectric and 1206 case.
- Reflow/wave soldering

20% OFF

¥ 1.49

产品编号  
130181106

RES, 1R, 1%, 30W, TO-220, THICK FILM

**CADDOCK**



- Through Hole Resistor, Kool-Pak®, 1 ohm, MP900, 30 W, ± 1%, TO-220, 250 V
- The MP930-1.00-1% is a Power Film Resistor constructed with Caddock's Micronox® resistance film fired onto a flat ceramic substrate.
- Solderable terminal

10% OFF

¥ 34.68

产品编号  
161202106

CRYSTAL, 32.768KHZ, 12.5PF, SMD

**ABRACON**



- Crystal, 32.768 kHz, SMD, 3.2mm x 1.5mm, 12.5 pF, 20 ppm. ABS07
- Guaranteed ESR of 60kΩ maximum for low power designs
- 0.9mm height ideal for high density circuit boards

10% OFF

¥ 8.41

产品编号  
210134706

CAP, 220μF, 35V, RADIAL, SMD

**Panasonic**



- SMD Aluminium Electrolytic Capacitor, Radial Can - SMD, 220 μF, 35 V, 2000 hours @ 105°C, Polar
- The Panasonic FK series capacitors are automotive grade type V, surface mount polarized aluminium electrolytic capacitors

30% OFF

¥ 3.93

产品编号  
969587706

FERRITE, BEAD, 0805, 0.045OHM, 2A

**muRata**  
INNOVATOR IN ELECTRONICS



- Ferrite Bead, 0805 [2012 Metric], 220 ohm, 2 A, BLM21, 0.045 ohm, ± 25%
- The Murata BLM21PG series are EMIFIL chip ferrite beads for suppressing high frequency noise in power line application.
- EIA 0805 standard chip size

21% OFF

¥ 0.26

产品编号  
151566106

FUSE, 1A, 125VAC/VDC, TIME DELAY, SMD

**Littelfuse**



- Fuse, Surface Mount, 1 A, Slow Blow, 125 VAC, 125 VDC, 2410 (6125 Metric), NAN02 Slo-Blo 452
- The 0452001.MRL is a 1A/125VAC Time Delay Fuse with ceramic body and gold-plated/Sn-dipped silver-plated caps termination.
- 0.225Ω Nominal cold resistance

20% OFF

¥ 9.86

产品编号  
238328306

CAP, 0.1μF, 50V, 5%, X7R,  
0805

**KEMET**  
o YAGEO company



- SMD Multilayer Ceramic Capacitor, 0.1 μF, 50 V, 0805 [2012 Metric], ± 5%, X7R
- KEMET's X7R dielectric features a 125°C maximum operating temperature and is considered "temperature stable."
- Operating temperature range from -55°C to +125°C

30% OFF

¥ 0.36

产品编号  
**141466306**

CAP, 10μF, 25V, 10%, X7R,  
1206

**TDK**



- SMD Multilayer Ceramic Capacitor, 10 μF, 25 V, 1206 [3216 Metric], ± 10%, X7R
- The CGA series Multilayer Ceramic Chip Capacitor offer high capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers

5% OFF

¥ 1.68

产品编号  
**221106806**

CAP, 22μF, 10V, 20%, X5R,  
0603

**muRata**  
INNOVATOR IN ELECTRONICS



- SMD Multilayer Ceramic Capacitor, 22 μF, 10 V, 0603 [1608 Metric], ± 20%, X5R
- The Murata GRM series capacitors are Multilayer Ceramic Chip Capacitors (MLCC) used for general purpose applications.
- Large capacity and small size in a multilayer structure

20% OFF

¥ 0.89

产品编号  
**242695706**

FERRITE, BEAD, 3216,  
100MHZ, 160R

**Laird**  
TECHNOLOGIES



- Ferrite Bead, 1206 [3216 Metric], 160 ohm, 6 A, HI, 0.018 ohm

20% OFF

¥ 1.01

产品编号  
**229237006**

FERRITE BEAD, 1200UOHM,  
5A

**FAIR-RITE Products Corp.**  
THE FAIR-RITE COMPANY



- Ferrite Bead, 5 A, 78 ohm
- The 2773021447 is a SM Bead with 73-grade material, differential-mode. The copper conductors have a lead-free tin coating.
- Supports lower frequencies (<lt/>50MHz)

30% OFF

¥ 2.40

产品编号  
**146341706**

人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 | 不含税

FERRITE BEAD, 0.250OHM,  
500MA, 0805

**TAIYO YUDEN**



- Ferrite Bead, 0805 [2012 Metric], 600 ohm, 500 mA, BK, 0.25 ohm, ± 25%

31% OFF

¥ 0.58

产品编号  
**161199506**

CAP, 0.1μF, 160V, 1%, PP,  
THROUGH HOLE

**VISHAY**  
Through Hole



- General Purpose Film Capacitor, Metallized PP, Radial Box - 2 Pin, 0.1 μF, ± 1%, 100 V, 160 V
- The MKP1837 series from Vishay are radial leaded, metallized polypropylene film capacitors.
- ±1%, ±2.5%, ±5% and ±10% tolerance

20% OFF

¥ 4.35

产品编号  
**116688706**

INDUCTOR, 33UH, 5.9A, 20%,  
PWR, 7.5MHZ

**Coilcraft**



- Power Inductor (SMD), 33 μH, 5.9 A, Shielded, 5.4 A, MSS1210, 12.3mm x 12.3mm x 10mm
- The MSS1210-333MEB is a surface mount shielded Power Inductor with ferrite core.
- Low DCR and excellent current handling


20% OFF

¥ 13.03

产品编号  
**228833406**

CRYSTAL, 32.768KHZ, 12.5PF,  
SMD

**ABRACON**



- Crystal, 32.768 kHz, SMD, 2mm x 1.2mm, 12.5 pF, 20 ppm, ABS06
- The ABS06-32.768KHZ-T is a 2 x 1.2 x 0.6mm 20ppm surface-mount low profile Crystal features ceramic offers excellent environmental and heat resistance ideal for high density circuit boards

¥ 6.27

产品编号  
**210134506**

CAP, 0.47μF, 50V, 10%, X7R,  
0603

**TDK**



- SMD Multilayer Ceramic Capacitor, 0.47 μF, 50 V, 0603 [1608 Metric], ± 10%, X7R
- Capacitance values ranging from 0.5pF to 100pF based on dielectric material

21% OFF

¥ 0.56

产品编号  
**234690806**

CAP, 10μF, 50V, 10%, X7R,  
1210

**TAIYO YUDEN**



- SMD Multilayer Ceramic Capacitor, 10 μF, 50 V, 1210 [3225 Metric], ± 10%, X7R
- The AVX multilayer ceramic capacitors with EIA class II, X7R dielectric material are temperature stable ceramic chip capacitors.
- Capacitance value ranges from 100pF to 100μF

20% OFF

¥ 5.92

产品编号  
**209404706**

FERRITE BEAD, 1KOHM,  
0.83A, 0603

**VISHAY**  
Through Hole



- Ferrite Bead, 0603 [1608 Metric], 1 kohm, 830 mA, WE-CBF, 0.3 ohm, ± 25%
- The special SMD chip bead ferrites can be put directly on the printed circuit board.
- Available Sizes: 0402, 0603, 0805, 1206, 1210, 1806, 2104

20% OFF

¥ 1.16

产品编号  
**289468606**

CAPACITOR, RADIAL, 100UF,  
50V

**Panasonic**



- Electrolytic Capacitor, 100 μF, 50 V, ± 20%, Radial Leaded, 3000 hours @ 105°C, Polar
- The Panasonic FM series capacitor are type A, radial leaded polarized aluminum electrolytic capacitor.
- High reliability

50% OFF

¥ 2.39

产品编号  
**121947806**

CURRENT SENSE RES, OR01,  
1%, 3 W, 2512

**BOURNS**



- SMD Current Sense Resistor, 0.01 ohm, CR, 2512 [6432 Metric], 3 W, ± 1%, Metal Film
- The CRA2512-FZ-RO10ELF is a high power current sense Chip Resistor with special alloy resistor and inductance less than 5nH, temperature coefficient with 75PPM and metal alloy plate construction

10% OFF

¥ 1.78

产品编号  
**143594706**

FUSE, SMD, 3A, SLOW BLOW,  
1206

**bel**  
POWER PROTECTION  
SOLUTIONS



- Fuse, Surface Mount, 3 A, Slow Blow, 63 VAC, 63 VDC, 1206 (3216 Metric), C1T Series

20% OFF

¥ 1.46

产品编号  
**284860806**

本册产品的折扣优惠参照 2022 年 2 月 e络盟官网售价制定

\* 网单金额满人民币 200 元 (不含增值税), 该订单即可享受免费送货服务

FERRITE, BEAD, 2012,  
100MHZ, 600RLaird  
TECHNOLOGIES

- Ferrite Bead, 0805 [2012 Metric], 600 ohm, 1.5 A, MI, 0.1 ohm
- The MI0805K601R-10 is a mid current EMI Ferrite Chip Bead with 0805 case.
- Small footprint

30% OFF

¥ 0.826

产品编号  
229246006INDUCTOR, 4.7UH, 10%,  
2.75A, 35MHZ

EPCOS

- RF Choke, BC+, 4.7  $\mu$ H, 2.75 A, 0.085 ohm,  $\pm$  10%, 35 MHz

10% OFF

¥ 1.21

产品编号  
277551006FUSE, SMD, 0.5A, FAST  
ACTING, 0603bel POWER  
SOLUTIONS &  
PROTECTION

- Fuse, Surface Mount, 500 mA, Fast Acting, 32 VAC, 63 VDC, 0603 (1608 Metric), C2F Series

5% OFF

¥ 0.89

产品编号  
284861206

CAP, 1UF, 16V, MLCC, 0402

SAMSUNG  
ELECTRO-MECHANICS

- SMD Multilayer Ceramic Capacitor, 1  $\mu$ F, 16 V, 0402 [1005 Metric],  $\pm$  10%, X5R

31% OFF

¥ 0.11

产品编号  
301332806CAP, 220 $\mu$ F, 50V, RADIAL,  
SMD

nichicon



- SMD Aluminium Electrolytic Capacitor, Radial Can - SMD, 220  $\mu$ F, 50 V, 1000 hours @ 105°C, Polar

30% OFF

¥ 3.77

产品编号  
211308806CRYSTAL OSCILLATOR, SMD,  
16.384MHZ

IQD



- VCTCXO, 16.384 MHz, 0.5 ppm, HCMOS, 3.3 V, SMD, 7mm x 5mm, CFPT-126
- The CFPT-126 series-surface-mount Temperature Compensated Voltage Controlled Oscillator (TCVCXO) providing a high degree of frequency stability over a wide temperature range in a hermetically sealed ceramic package

5% OFF

¥ 122.08

产品编号  
110075206CRYSTAL, 32.768KHZ, 6PF,  
3.2 X 1.5MM

ABRACON



- Crystal, 32.768 kHz, SMD, 3.2mm x 1.5mm, 6 pF, 20 ppm, ABS07 Low ESR Series
- The ABS07-120-32.768KHZ-T is a 3.2 x 1.5 x 0.9mm Tuning Fork Crystal with hermetically sealed and not moisture sensitive, load capacitance is of 6pF

20% OFF

¥ 9.40

产品编号  
246786406CRYSTAL, 32.768KHZ, 12.5PF,  
3.2 X 1.5MMTXC 台湾泰科电子有限公司  
TAC CORPORATION

- Crystal, Surface Mount, 32.768 kHz, SMD, 3.2mm x 1.5mm, 12.5 pF, 20 ppm, 9HT10 Series
- The 9HT10-32.768KDZF-T is a 2-pin SMD tuning fork Quartz Crystal.
- $\pm$ 3ppm/year Maximum aging

20% OFF

¥ 4.68

产品编号  
206172406CHOKE, COM/ASYM MODE,  
2X3.0MH, 1.0A

SCHAFFNER



- Choke, Current-Compensated, 3 mH, 1 A, RN Series

3% OFF

¥ 8.87

产品编号  
119146206

CRYSTAL, 50MHZ, 15PF, SMD

IQD



- Oscillator, Crystal, 50 MHz, 50 ppm, SMD, 3.2mm x 2.5mm, 3.3 V, CFPS-39 Series
- The LFSPXO025560 from IQD Frequency Products is a standard 3.2mm x 2.5mm surface mount crystal oscillator.
- Frequency of crystal oscillator is 50MHz

20% OFF

¥ 10.19

产品编号  
127665206CAP, 1000PF, 50V, 5%, COG/  
NPO, 0805YAGEO  
Innovation Service Around the Globe

- SMD Multilayer Ceramic Capacitor, 1000 pF, 50 V, 0805 [2012 Metric],  $\pm$  5%, COG / NPO
- The Yageo CC series capacitors are Multilayer Ceramic Chip Capacitors (MLCC) with Class 1,

NPO dielectric material used for general purpose applications

31% OFF

¥ 0.43

产品编号  
71856706CAP, 10 $\mu$ F, 50V, 20%

Rubycon



- Electrolytic Capacitor, Miniature, 10  $\mu$ F, 50 V,  $\pm$  20%, Radial Leaded, 5000 hours @ 105°C, Polar
- The Rubycon YXF series are miniaturized, long life, low impedance and radial leaded aluminium electrolytic capacitors.
- Capacitance value ranges from 1  $\mu$ F to 15000  $\mu$ F

30% OFF

¥ 1.10

产品编号  
114463206FERRITE BEAD, 0.015OHM,  
6A, 1206MEC  
Micro Electronic Components Inc.

- Ferrite Bead, 1206 [3216 Metric], 120 ohm, 6 A, MFB, 0.015 ohm,  $\pm$  25%
- The MFB-321611-0120PW is a high current Ferrite Chip Bead with 1206 case.
- 0.015Ω Maximum DC resistance

50% OFF

¥ 1.09

产品编号  
130879006CURRENT SENSE RES,  
0R0015, 1%, 3 W, 2512

TT Electronics



- SMD Current Sense Resistor, 0.0015 ohm, ULR, 2512 [6432 Metric], 3 W,  $\pm$  1%, Metal Strip

20% OFF

¥ 5.90

产品编号  
129250706CAP, 180PF, 250V, 5%, COG/  
0805, SMD

JOHANSON TECHNOLOGY



- Capacitor, RF, High-Q, 180 pF, 250 V, S,  $\pm$  5%, 125 °C, 0805 [2012 Metric]

¥ 0.80

产品编号  
188545306人民币(元) | 目录商品参考标价  
为目录商品  
价格货币单位 | 不含税



## 主流 3D 打印技术与应用创想

3D 打印在过去的 20 年中迅速发展，从最初仅面向大型企业和少数行业的专用设备发展至目前有可以在车库和家庭实验室中供个人使用的经济型产品，正不断拓展新的领域、发展创新应用。

技术日臻成熟，现有设备也集成了更多功能，例如 StepCraft 的 M-1000 系列，除可执行 3D 打印操作外，还能够进行雕刻、CNC 铣削、绘图、切割等操作。又例如 Snapmaker 2.0，采用模块化设计，用户可通过更换不同的打印头以实现更多功能。此外，3D 打印已经逐步走进人们的生活，能够进行披萨饼等多种食物的制作，还能够建造房屋。

3D 打印技术几乎可以应用于任何项目，也可以在任何地方使用。在太空中，3D 打印机已经服务于国际空间站，为之构造所需的工具。制造业也已受益于 3D 打印技术的发展，自 COVID-19 大流行以来，该技术在医疗设备制造领域发挥了独特的作用。

增材制造节省了原材料、时间和成本。从时尚产品到自动驾驶汽车，每个行业都将 3D 打印作为当今和未来应用的优势工具。那么接下来 3D 打印技术将会如何发展呢？

有专家认为，3D 打印可为个人按需定制产品。例如，定制心脏瓣膜或其他降低排斥可能性的新器官，新的医疗应用将极大地助推行业发展和人类进步。部分业内人士则认为 3D 打印在现有工作流程中扮演更重要的角色，能够提高作业灵活性和效率。也有的技术人员认为，3D 打印可以成为更好的 STEM 教学工具。我们还知道，NASA 一直在探索利用 3D 打印技术在月球和火星上创造栖息地。

作为趋势，3D 打印快速、灵活、精准的构筑功能可以帮助解决人们个性化或应急需求。可以说，3D 打印这项有趣且通用的技术将不断发展，在未来几年持续推动创新，并拥有无限可能。

# 探寻您的 3D 打印解决方案



## multicomp PRO

Multicomp MC-I20 开箱即用型 3D 打印机，对于新手几乎没有学习曲线。可伴您制作出精美的打印件，即使采用 ABS 材质亦是如此。它与流行的 Cura 和 Simplify3D 等软件包完全兼容，并配置了 SD 卡插槽，因此甚至无需连接电脑即可使用。

**Multicomp MC-I20** | 产品编号: 289089606



## CREALITY

Ender-3 V2 是广受欢迎的 Ender -3 升级版，具有快速加热和超静音打印模式。采用脊状的全金属机身以及新的碳化硅玻璃平台，可提供更好的床性能。打印机还可以在断电后通过检测其在 gcode 中的位置并从停止处继续打印来恢复打印。

**CREALITY 3D ENDER-3 V2** | 产品编号: 358185106



## CREALITY

CR-10 Max 是一款更大幅面打印机，床身尺寸为 450x450x470mm，实心三角框架具有更好的稳定性。它配备了摩羯座特氟龙管，双驱动快速送料，双增压效果导轨式传输，可实现快速多样的打印。

**CREALITY 3D CR-10 MAX** | 产品编号: 323416906



## Ultimaker

Ultimaker S5 能够长时间持续作业。它具有适用于多种材料打印的双挤出功能，以及用于实现 ABS 平滑打印的加热床。它支持水溶性耗材，可制作光滑的表面和复杂的几何形状。

**ULTIMAKER S5** | 产品编号: 299257306



## BCN3D

Epsilon W27 打印机提供工业级材料零件专业解决方案。它具有被动加热室、全封闭和湿度控制环境。较 Epsilon W50 和 W27 ABS 两款机型，可塑造更优质、易于翘曲的作品。5 英寸全彩电容式触摸屏便于操控。可通过 Wi-Fi 或以太网连接（在线）或 SD 卡（离线）进行打印。

**BCN3D EPSILON W27** | 产品编号: 360534006

# 测试测量与维修工具

您可以在 e络盟找到各类测试、测量和检修工具，包括万用表、示波器、PAT 测试设备、连续性测试仪等等。

欢迎在线浏览相关产品：

[cn.element14.com/eselect05\\_testandtool](http://cn.element14.com/eselect05_testandtool)

## HEAT SINK COMPOUND, JAR, 0.23KG

 WAKEFIELD THERMAL



- Heat Sink Compound, Silicone, Oil Based, Container, 8oz
- The I20-8, from Wakefield Solutions is a silicone oil-based thermal joint compound.
- 8oz jar

10% OFF

¥ 208.92

产品编号  
**335403906**

## DISSIPATIVE MAT ROLL, 610MM X 15.2M

 SCS



- Dissipative Mat Roll, Vinyl, Blue, 610mm W x 15.2m L
- Tough, easy-to-clean dissipative vinyl top layer
- Premium 3-layer work surface mat roll

3% OFF

¥ 3,926.42

产品编号  
**290739706**

## CONNECTOR, PCB, 2CONTACTS

 DELTRON Components



- Test Jack, 4mm Dia Test Plugs, 10 A, 1.94 mm, 50 V, Black, 571
- The 571-0100 is a 4mm right angle Insulated Socket for direct mounting onto a printed circuit boards.
- 10mΩ Maximum contact resistance

30% OFF

¥ 11.45

产品编号  
**149459506**

## BRUSH, TECHNICAL CLEANING

 TECHSPRAY



- Conductive Brush, TechClean, 1/2" x 3/8", Horse Hair
- Five tons of pressure are applied to each metal brush handle to ensure that the bristles remain intact during the most rigorous applications
- High quality

¥ 79.25

产品编号  
**165684706**

## CARBON CONDUCTIVE GREASE, 76.2ML, TUBE



 MG Chemicals

- Lubricant, Electrical Conductive, Grease, Carbon, Tube, 76.2 ml
- 846 is an economical, carbon-filled, electrically conductive grease.
- Resistivity of 114ohmcm

10% OFF

¥ 143.60

产品编号  
**281192406**

## BI-COMPONENT POLYMER GEL 300ML MAGIC GEL



 RayTech

- Bi-Component Polymer Gel, Magic Gel, IP68, Silicone, Bottle, Blue, 2 x 300 ml
- The MAGIC GEL 300 from Raytech is an insulating and sealing polymeric fluid with fast cross linking at room temperature.
- For installations up to 1kV

10% OFF

¥ 167.05

产品编号  
**166303906**

## DISPENSER, ATG 700, FOR 3M 924 TAPE



 3M Science, Applied to Life.

- Tape Dispenser, For 3M 924 Tape
- The ATG 700 from 3M is a Scotch yellow colour adhesive applicator.
- Holds up to 55m of Scotch(R) ATG tapes

10% OFF

¥ 350.18

产品编号  
**186995706**

## FIBRE OPTIC WIPE, 76 X 76MM

 Chemtronics



- Fusion Splice Wipes, Pre-Saturated, Soft, Lint Free, 76mm x 76mm, Pack of 75
- Fusion Splice wipes are conveniently packaged wipes for a variety of applications.
- Perfect for safe travel and easy transportation

¥ 30.72

产品编号  
**245680306**

## BANANA SOCKET, 32A, 4MM, PANEL, BLACK

 HIRSCHMANN Test & Measurement



- Banana Test Connector, 4mm, Socket, Panel Mount, 32 A, 1 kV, Gold Plated Contacts, Black
- Safety built-in socket, 4 mm diameter, touch-protected, M 4 thread and solder connection, gold-plated brass.
- 4 mm safety system

30% OFF

¥ 61.28

产品编号  
**101140106**

## ADHESIVE, HOT MELT, 1PK

 POWER ADHESIVES



- Adhesive, Transparent, Hot Melt, 300 mm, Stick, 12 mm
- The 240/12/300 from Power Adhesives is a synthetic polymer based hotmelt clear

high performance, product assembly adhesive which has excellent adhesion to wood, ceramics, light gauge metals and many plastics

10% OFF

¥ 197.70

产品编号  
**704811706**

## BORON NITRIDE H/SINK GREASE

 Chemtronics



- Heat Sink Grease, Boron Nitride, CircuitWorks®, Syringe, 3.4 g
- CircuitWorks Boron Nitride Heat Sink Grease facilitates heat transfer away from electrical/electronic components and into heat sinks.
- Exceeds MIL C 47113 for thermal conductivity

10% OFF

¥ 98.77

产品编号  
**166319006**

## ADAPTOR, TRIAX TO BNC, 3 SLOT MALE

 KEITHLEY

A Tektronix Company



- Test Accessory, 3 Slot Male Triax to BNC Adapter
- The 7078-TRX-BNC from Keithley is a 3 slot male triax to BNC adapter

0% OFF

¥ 1,187.30

产品编号  
**207746806**

人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 不含税

本册产品的折扣优惠参照 2022 年 2 月 e络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税), 该订单即可享受免费送货服务

OSCILLOSCOPE, PC, 10MHZ,  
WITH AWG

- PC USB Oscilloscope, PicoScope 2000, 2 Channel, 10 MHz, 100 MSPS, 8 kpts, 35 ns
- This PicoScope 2200 Series oscilloscope offers a small, light, modern alternative to bulky benchtop devices.
- 2 channels

**¥ 997.45**产品编号  
**236542506**OSCILLOSCOPE, 20CH,  
200MHZ, 10GSPS

- PC USB Oscilloscope, PicoScope 3000, 4+16 Channel, 200 MHz, 1 GSPS, 512 Mpts, 1.75 ns
- PicoScope 3000 Series USB-powered PC oscilloscopes are small, light, and portable and can easily slip into a

3% OFF

**¥ 16,691.52**产品编号  
**243291306**PC MSO, 200MHZ, 1GSPS,  
1.75NS

- PC USB Oscilloscope, FlexRes Osc, PicoScope 5000D, 4 Analogue, 16 Digital, 200 MHz, 1 GSPS
- PicoScope® 5000 Series FlexRes® mixed signal oscilloscopes with 16 digital channels supported by PicoScope 6 software for use at design, research, test, education, service and repair

3% OFF

**¥ 21,232.28**产品编号  
**289319806**OSCILLOSCOPE, 16MHZ, 2  
CHANNEL, 2500GSPS

- PC USB Oscilloscope, PicoScope 9400, 2 Channel, 16 GHz, 2500 GSPS, 250 kpts, 21.9 ps
- 9400 series 16GHz 2 channel sampler-extended real-time oscilloscope (SXRTOs).
- 22ps transition time and 2.5TS/s (0.4ps resolution) random equivalent-time sampling

**¥ 128,409.99**产品编号  
**381766106**DATA LOGGER, -270DEG TO  
1880DEG, PC, USB

- DataLogger, PC, USB, 270DEG to 1880DEG
- It can measure temperatures from -270°C to +1820°C and works with all popular types of thermocouple (B, E, J, K, N, R, S, T).
- Measures and records up to 8 thermocouples

3% OFF

**¥ 2,928.05**产品编号  
**782017806**人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 | 不含税OSCILLOSCOPE, 4  
CHANNELS, 25 MHZ

- PC USB Oscilloscope, Digital Triggering, PicoScope 2000, 4 Channel, 25 MHz, 500 MSPS, 48 kpts
- This PicoScope 2000 series is a general purpose pocket-size PC oscilloscope.
- USB2 connected and powered

**¥ 3,200.50**产品编号  
**253547106**USB OSC, 20MHZ, 50MSPS,  
4CH

- PC USB Oscilloscope, PicoScope 4000, 4 Channel, 20 MHz, 50 MSPS, 256 Mpts, 17.5 ns
- Most oscilloscopes employ grounded BNC inputs where the shell is tied directly to ground, which means

3% OFF  
**¥ 10,805.34**产品编号  
**274859306**PC USB OSCILLOSCOPE, 1  
GHZ, 4 CHANNEL

- PC USB Oscilloscope, PicoScope 6000E, 4 Channel, 1 GHz, 5 GSPS, 4 Gpts, 350 ps
- PicoScope 6426E is a PicoScope 6000E Series FlexRes oscilloscopes

provide 8 to 12 bits of vertical resolution, with up to 1GHz bandwidth and 5GS/s sampling rate.

Supports up to 16 digital MSO channels

**¥ 100,134.64**产品编号  
**376885706**VECTOR NETWORK  
ANALYZER, 300KHZ TO 6GHZ

- Vector Network Analyser, PC Based, 300kHz to 6GHz, 3 Years
- High speed of <gt> 5000 dual port S-parameters per second
- Professional USB-controlled, laboratory grade 6GHz vector network analyser

**¥ 39,476.85**产品编号  
**357771106**DATALOGGER, HI-RES WITH  
TERMINAL BOARD

- Data Logger, USB Precision, 24 Channels
- The ADC-24 data logger is able to detect small changes.
- 24 bit resolution

3% OFF  
**¥ 4,878.41**产品编号  
**107633906**人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 | 不含税OSCILLOSCOPE, 2 + 16  
CHANNELS, 100 MHZ

- PC USB Oscilloscope, Digital Triggering, PicoScope 2000, 2+16 Channel, 100 MHz, 1 GSPS, 128 Mpts
- This PicoScope 2000 series is a general purpose pocket-size PC oscilloscope.
- USB2 connected and powered

3% OFF

**¥ 6,886.84**产品编号  
**253548206**PC OSCILLOSCOPE, 8CH,  
20MHZ, 80MSPS

- PC USB Oscilloscope, PicoScope 4000A, 8 Channel, 20 MHz, 80 MSPS, 256 Mpts, 17.5 ns
- PicoScope® 4000A Series PC oscilloscopes is a second-generation upgrade and expansion of our high-resolution,

3% OFF

**¥ 16,607.43**产品编号  
**362540106**PC OSCILLOSCOPE, 8CH,  
500MHZ, 850PS

- PC USB Oscilloscope, PicoScope 6000E, 8 Channel, 500 MHz, 5 GSPS, 4 Gpts, 850 ps
- The PicoScope 6000 series scopes have the best bandwidth, sampling rate and memory depth of any USB oscilloscope combined with great features from our advanced software offering.

**¥ 95,364.26**产品编号  
**336099806**AGILE SYNTHESIZER, 1 CH,  
8.192GHZ

- RF Signal Generator, RF, 8.192 GHz, 1 Channel, PicoSource, AM, FM, PM, 1 Year
- The PicoSource™ AS108 Agile Synthesizer is designed to meet the needs of both benchtop and integrated module applications.

**¥ 40,772.01**产品编号  
**296565706**DATA LOGGER, CURRENT, 3  
CURRENT CLAMPS

- Data Logger, AC Current, 3 Channels
- The PicoLog CM3 Current Data Logger is a compact, easy-to-use data logger for measuring the power consumption of buildings and machinery.
- 3 channel current data logger

3% OFF

**¥ 4,050.90**产品编号  
**206995006**

**pico**<sup>®</sup>

Technology

# 示波器, 数据记录仪 及射频仪器

适用于复杂设计的调试与测试



6GHz和8.5GHz  
的矢量网络分析仪



10MHz到1GHz  
带宽的实时示波器



具备PicoLog Cloud云端  
测试的数据记录仪分析软件

## LABVIEW SOFTWARE-PROFESSIONAL EDITION



- Test Software, LabVIEW, Professional, Development Use, Perpetual License, USB, Multi Language
- The LabVIEW

programming environment simplifies hardware integration for engineering applications so that you have a consistent way to acquire data from NI and third-party hardware

3% OFF

¥ 48,082.90

产品编号 362107906

## CRIMP TOOL FRAME ONLY



- Crimp Tool, Modular Plugs, RF Coaxial Connectors, Terminals & Splices
- The 30-506 is a Crimpmaster™ Crimp Frame Tool with high

quality ratchet-type for electricians, contractors and installers who require guaranteed repeatability of good mechanical and electrical connections

5% OFF

¥ 755.37

产品编号 140897506

## ACTIVE PROBE, 1GHZ 10:1



- Oscilloscope Probe, Active, 1 GHz, 20 V, 10:1, All Makes & Models of Oscilloscopes, TETRIS

10% OFF

¥ 6,232.00

产品编号 182230206

## HIGH VOLTAGE PASSIVE PROBE, 400MHZ, OSC



- Oscilloscope Probe, High-Voltage Passive Probe, 400 MHz, 1 kV, 100:1
- For use with RTM3000/ RTA4000, RTE1000, RTO2000 series oscilloscopes
- 400MHz high voltage passive probe with 100:1 attenuation

¥ 3,586.86

产品编号 338112306

## 19" RACK MOUNT KIT, SPECTRUM ANALYZER



- Rack Mount Kit, 19" Rackmount Kit, R&S FPC1000/FPC1500 Spectrum Analyzers, FPC
- For FPC1000/FPC1500 spectrum analysers
- 19" rackmount kit

3% OFF

¥ 1,213.69

产品编号 310703706

## CURRENT PROBE, AC/DC, 10MHZ, 150A



- Current Probe, BNC, Current Clamp, 150 A, R&S RTM3000/ RTA4000, RTE1000, RTO2000 Oscilloscopes
- RT-ZC10B is an AC/DC current probe. It allows the user to make current measurements from DC to 10 MHz.
- Highly accurate current detection

¥ 39,600.02

产品编号 377120006

## DIGITAL MULTIMETER, 6.5DIGIT, 300V, 3A



- Digital Multimeter Device, PCIe-4065, 6.5 Digit, 3 A, 300V
- The PCIe-4065 makes AC/DC voltage, AC/DC current, and 2- or 4-wire resistance measurements, as well as diode tests

¥ 13,065.00

产品编号 362156606

## CUTTING TWEEZER



- Tweezer, Cutting, Curved, 114 mm, Carbon Steel Body, Carbon Steel Tip
- Cutting tweezers with narrow oblique head. For soft wires up to dia. 0.25 mm/.010 Inch
- Suitable for cutting fine, soft wires and small components

¥ 242.82

产品编号 725658906

## DIGITAL I/O DEVICE, DAQ DEVICE



- Digital I/O Device, PCIe-6509, 96 I/O, 0 V to 5 V, DAQ Device
- The PCIe-6509 can directly drive external digital devices such as solid-state relays (SSRs)

¥ 3,290.00

产品编号 362161406

## DECADE RESISTANCE BOX, 1 TO 1111110 OHM



- Decade Box, Resistance, 7, 1ohm to 11.1111Mohm, 1%
- Resistance, Capacitance & Inductance Decade Boxes.
- Durable construction

## DATA ACQUISITION, 250 CH/SEC, 22 BIT



- Data Acquisition Unit, 3-Slot Mainframe, 6.5 Digit DMM, 240 V, Keysight Switch Unit Series
- The Keysight 34970A Data Acquisition / Data Logger

Switch Unit consists of a three-slot mainframe with a built-in 6 1/2 digit digital multimeter.

- 3-slot mainframe with built-in GPIB and RS232 interfaces

¥ 19,216.13

产品编号 133586706

## DC LOAD, PROG, 60A, 0-120V, 250W

BK PRECISION



- DC Electronic Load, 8600, 250 W, Programmable, 0 V, 120 V, 60 A
- The BK8600 Series programmable DC electronic loads provide the performance of modular system DC electronic loads in a compact benchtop form factor.
- Wide voltage and current range, 0 to 500 V, 0 to 240 A

3% OFF

¥ 10,998.09

产品编号 247514006

## DATA LOGGER, TEMP, -270 TO 1820 DEGC

pico Technology



- Data Logger, Temperature, 8 Channels, 10, TC-08
- Bundle consisting of thermocouple data logger with 1.8m Pico blue USB 2.0 cable and SE027 exposed junction thermocouple with PTFE insulated, 0.2mm twisted pair conductor.
- Measures and records up to eight thermocouples at

3% OFF

¥ 2,928.05

产品编号 284648006

## DOLPHIN CLIP, 2PK, 39.5MM, RED/BLK, 32A

STAUBLI MC



- Crocodile Clip, Dolphin, Pack 2, 39.5 mm, 32 A, Black, Red
- The 66.9575-21 + 66.9575-22 is a 32A/600V Red/Black Dolphin Clip with all-round installation, made of brass.
- Category III safety

20% OFF

¥ 118.49

产品编号 338350706

## COIL CORD, 3.4MM PLUG, 30M, GREY

SCS



- ESD Grounding Cord, Grey, 10ft, 1Mohm
- For use with dual conductor wrist straps and SCS workstation monitors
- 10 feet dual conductor coiled cord with straight 3.4mm straight mono plug

3% OFF

¥ 281.87


产品编号 290734106

# 机电产品

欢迎从我们广泛的机电产品系列中选择适用的开关、继电器、传感器和电源等产品为您的项目提供有力支持。

欢迎在线浏览相关产品:

[cn.element14.com/eselect05\\_emech](http://cn.element14.com/eselect05_emech)

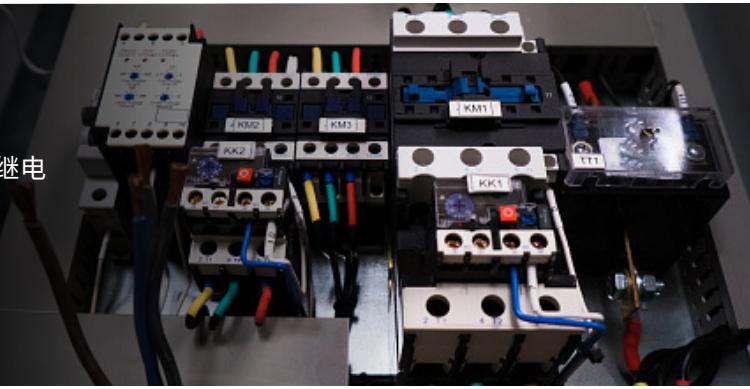

HOLDER, BATTERY, 1 CELL, 12MM

**KEYSTONE**



- Battery Holder, Coin Cell - 12mm x 1, Through Hole
- PCB mountable coin cell holder
- PCB connections via solder pins

20% OFF

**¥ 8.00**

产品编号  
**302983906**

FUSE HOLDER, PCB, 20X5MM

**SCHURTER**  
ELECTRONIC COMPONENTS



- Fuseholder, PCB Mount, Open Design, 250V, 10A, 5 x 20mm, Solder, Screw / Rivet / Through Hole, IP20
- The 0031.8211 is a 10A PCB Cartridge Fuse Holder with thermoplastic cover and tin-plated copper alloy terminals. UL94V-0 Flammability rating

20% OFF

**¥ 6.04**

产品编号  
**116274106**

FUSE HOLDER, 5 X 20MM, PCB MOUNT

**KEYSTONE**



- Fuseholder, PCB Mount, 250V, 5A, 5 x 20mm, Solder, Through Hole
- The 4527 is a 5mm Low Profile Holder for use with 5 x 20mm vertical entry cylindrical fuse. It supports through hole mounting. It is made of G-10 brass with tin plate finish

**¥ 1.74**

产品编号  
**230127406**

FUSE HOLDER, 20X5MM, BODY ONLY

**Littelfuse**



- UL 94-V0 rated thermoplastic material

- Fuseholder, Body Only, Panel Mount, 250V, 16A, 5 x 20mm, Solder / Quick Connect
- The 820 series from Littlefuse are panel mount, shock safe enclosed fuse holders

10% OFF

**¥ 19.22**

产品编号  
**124303606**

FUSE HOLDER, IP68, 5X20MM, PANEL



10% OFF

**¥ 22.53**

产品编号  
**963019806**

JOYSTICK, MICROSWITCH, 6A, 250V



- Fuseholder, Panel Mount, Touchproof, 250V, 10A, 5 x 20mm, Solder Tags, Screw Cap, IP68, PC2
- Designed for user safety, touchproof category PC2 with polyester moulded body and nylon cap/end bung.

INDICATOR LED PANEL 5MM, RED/GREEN, 2.1V



20% OFF

**¥ 17.46**

产品编号  
**112613206**

ACTUATOR, 150DEGC, MAX TEMPERATURE



5% OFF

**¥ 9.15**

产品编号  
**178269106**

AXIAL FAN, 80MM, 230VAC, 65mA



**NMB**

- AC Axial Fan, 230V, Square, 80 mm, 38 mm, Ball Bearing, 33 CFM
- The 3115FS-23T-B30-A00 is a 230VAC Axial Fan with ball bearing and terminal power connection.
- UL94V-0 Flammability rating

5% OFF

**¥ 99.26**

BATTERY HOLDER, 1WAY



产品编号  
**137037606**

**KEYSTONE**

- Battery Holder, Coin Cell - 20mm x 1, Through Hole
- The 1066 is a through hole mount (Vibra-Fit/EZ-Out) 1-way Battery Holder for 2025 and 2032 20mm cell. Plastic construction
- Battery pop-in from top of compartment applications

20% OFF

**¥ 5.91**

LED INDICATOR, 24V GREEN



产品编号  
**421883806**

**CML**  
CONNECTIVE TECHNOLOGIES

- LED Panel Mount Indicator, Satin Chrome Bezel, Green, 24 VDC, 8 mm, 20 mA, 32 mcd, IP67
- The 19050351 is a LED Panel Mount Indicator with satin chrome recessed metal bezel, M8 screw thread and 8mm maximum panel thickness.
- Standard indicator

10% OFF

**¥ 7.73**

产品编号  
**133983906**

本册产品的折扣优惠参照 2022 年 2 月 e络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税), 该订单即可享受免费送货服务

## FUSE HOLDER, PCB, 250V, 5A

**EATON**  
Powering Business Worldwide

- Fuseholder, PCB Mount, 250V, 5A, 5 x 20mm, Solder, Through Hole
- Fuse holder/fuse carrier set for 20 x 5 fuses.
- 

20% OFF

¥ 3.75

产品编号  
255063406DC-DC CONVERTER, 5V, 0.2A **XP** XP Power

- Isolated Surface Mount DC-DC Converter, 1.5kV Isolation, ITE, 1:1, 1W, 1 Output, 5V, 200 mA
- The ISE series is an isolated, 1W surface mount DC-DC Converter with a single output.
- Single output

3% OFF

¥ 28.43

产品编号  
247577206

## HEAT SINK, TO-220/218, 5.6°C/W

**AAVID**  
THERMAL DESIGN BY BOYD

- Heat Sink, Square, PCB, With Radial Fins, 5.6 °C/W, TO-218, TO-220, 41.91 mm, 25.4 mm, 25.4 mm
- High power extruded heat sink with large radial fins and straight pins.
- Radial fins

¥ 7.24

产品编号  
121347206

## DIN MOUNTING RAIL, 35MM, ALUMINIUM

**OMRON**

- DIN Mounting Rail, DIN Mounting Rail, Omron S82J Series Din Rail Switching Power Supplies, 1 m
- The PFP-100N is a DIN Rail Mounting Track made of rugged anodized aluminum

20% OFF

¥ 113.52

产品编号  
141641906

## CAP, PUSHBUTTON SWITCH, BLACK

**C&K**

- Switch Cap, C & K Components PHB Series Short Stroke Pushbutton Switches, Black, PHB

10% OFF

¥ 2.83

产品编号  
326325806

## DC/DC CONVERTER, 12V, 10A

**EATON**  
GE Critical Power

- Isolated Through Hole DC/DC Converter, Hammerhead, ITE, 4:1, 120 W, 1 Output, 12 V, 10 A
- The open frame module construction enables designers to develop cost and space efficient solutions.
- Flat and high efficiency curve

¥ 252.12

产品编号  
245069006

## CAP, BLACK

**OMRON**

- Switch Cap, Omron B3F And B3W Series Tactile Switches, Black, KEYCAPS FOR TACTILE Series
- The B32-1010 is a black tactile switch Key Top designed especially for projected-plunger-

type 6 x 6mm B3F-1000, B3F-1000-G, B3F-3000, B3F-3000-G, B3F-6000, B3W-1000 and B3FS-1000 switches

¥ 1.34

产品编号  
17643706

## BATTERY SMD RETAINER

**KEYSTONE**

- Battery Contact, Coin Cell - 12mm, SMD, Phosphor Bronze
- The 3000 is a SMT Battery Holder for 12mm coin cell. It is made of phosphor bronze material and tin-nickel plated finishing.
- Suitable for BR1216, CR1216, BR1220, CL1220, CR1220, BR1225 Coin Cell

3% OFF

¥ 1.84

产品编号  
165069206

## LED INDICATOR, HE GRN

**Dialight**

- LED Panel Mount Indicator, Snap-in, Green, 2.1 VDC, 3.96 mm, 10 mA, 16 mcd, Not Rated
- The 558-0201-007F is a green 3mm front panel mount LED Indicator with black PBT housing that enhances LED contrast.
- Uniform illumination

5% OFF

¥ 7.85

产品编号  
151943906

## BOX, DIECAST, IP54, 188X188X63MM

**HAMMOND**  
MANUFACTURING

- Metal Enclosure, Shielded, Diecast, IP54, Small, Diecast Aluminium, 188 mm, 188 mm, 63 mm, IP54
- 1590 series general purpose, wall-mounting diecast aluminium

enclosure with no mounting flange and standard version

20% OFF

¥ 249.50

产品编号  
93004006

## HEAT SINK, 2.6K/W, TO-220

**AAVID**  
THERMAL DESIGN BY BOYD

- Heat Sink, Square, PCB, With Radial Fins, 2.6 °C/W, TO-220, 41.91 mm, 63.5 mm, 25.4 mm
- The 530002B02500G is a 25.4mm extruded Heat Sink with aluminium construction, black anodized finish, large radial fins and solderable pins, 2.6°C/W thermal resistance. Vertical mount orientation

¥ 10.35

产品编号  
229571906

## HOLDER, SMD BATTERY, FOR CR 2032

**RENATA**  
BATTERIES


- Battery Holder, Coin Cell 20mm x 1, SMD
- The SMTU 2032-LF from Renata is a surface mount, battery holder for lithium CR2032 coin cells. Material used for holder is heat resistant, glass fiber filled LCP
- UL E218732 recognized

20% OFF

¥ 7.39

产品编号  
121635406

## HUMIDITY/TEMP SENSOR, DIGITAL, DFN-6


**SENSIRION**  
THE SENSOR COMPANY

- Temperature and Humidity Sensor, 0 to 100% RH, -40°C to 125°C, I2C, Digital, DFN-6, 2.1 to 3.6 V
- The SHT21 is a standard version humidity and temperature sensor IC in 6 pin DFN package.
- Low power consumption and excellent long term stability

¥ 26.11

产品编号  
185546806

## GEL FILLED PRESSURE SENSOR, 30BAR, 3V

**ETE**  
AUTOMATED INSTRUMENTATION

- Pressure Sensor, 30 bar, Digital, Sealed Gauge, 3 V, 0.01 μA

20% OFF

¥ 87.26

产品编号  
271741506

## FILTER, 10A, MULTI STAGE, CHASSIS

**SCHAFFNER**

- Power Line Filter, Chassis, General Purpose, 250 VAC, 10 A, Single Phase, 2 Stage, Chassis Mount
- It is a 10A/250VAC multi-stage general purpose EMI Filter, energy efficiency and reliability

3% OFF

¥ 147.82

产品编号  
119137506

## FAN, 80X80X38MM, 12VDC

**SANYO DENKI**

- DC Axial Fan, 12 V, Square, 80 mm, 38 mm, Ball Bearing, 130.7 CFM

5% OFF

**¥ 243.26**产品编号  
**229016806**

## BLDC MOTOR, 24VDC, 6100RPM

**Nanotec®**

- DC Motor, BLDC, Brushless, 24 V, 6100 rpm, 0.39 N-m, 65 W, 42.8 mm
- The DF45L024048-A2 is a 3-phase Flat Brushless DC Motor with 16-pole external rotor for smooth running and a long service life.
- Linear torque curve

5% OFF

**¥ 615.65**产品编号  
**250757306**

## DC-DC CONVERTER, 12V, 2A

**RECOM**

- DC/DC Converter, ITE, 1 Output, 24 W, 12 V, 2 A, R-78B-2.0 Series

10% OFF

**¥ 95.34**产品编号  
**274752906**

## DC-DC CONVERTER, 5V, 1A

**RECOM**

- DC/DC Converter, ITE, 1 Output, 5 W, 5 V, 1 A, R-78-1.0 Series
- The R-785-0.1-0 is a 1-output non-isolated PoL Switching Regulator/DC/DC-Converter, ideally suited to replace 1A 78xx linear regulators and are pin compatible.
- Efficiency up to 94%, no need for heatsinks

3% OFF

**¥ 49.97**产品编号  
**179314306**

## FUSE HOLDER, 5 X 20MM, PANEL MOUNT

**EATON**  
Powering Business Worldwide

- Fuseholder, Panel Mount, 250V, 16A, 5 x 20mm, Quick Connect, Fingergrasp Cap

**¥ 36.83**产品编号  
**119583006**

## FILTER, 16A, 3 PHASE, NEUTRAL

**SCHAFFNER**

- Power Line Filter, Installation, General Purpose, 250 VAC, 16 A, Three Phase, 1 Stage
- The FN356-16-06 is a 3-phase and neutral line 16A General Purpose Filter providing high attenuation of both symmetrical and asymmetrical interference

3% OFF

**¥ 1,157.33**产品编号  
**119132206**

## ADAPTOR, AC-DC, MEDICAL, 12V, 4A

**XP** XP Power

3% OFF

**¥ 253.07**产品编号  
**186084206**

## AXIAL FAN, 120MM, 12VDC, 171CFM, 58DBA

**SANYO DENKI**

- DC Axial Fan, 12 V, Square, 120 mm, 25 mm, Ball Bearing, 171 CFM
- The 9GV1212P4G01 is a 12VDC 24mm thick Axial Fan with a ball bearing.
- 40000 Expected life

3% OFF

**¥ 259.62**产品编号  
**276883006**

## DIP SWITCH, 4POS, SPST, SLIDE, SMD

**Nidec**  
NIDEC COPAL ELECTRONICS

- DIP / SIP Switch, 4 Circuits, Slide, Surface Mount, SPST, 6 V, 100 mA
- Highly reliable dip slide half-pitch switches. They are ideal for professional industrial applications where high level of contact reliability is essential

3% OFF

**¥ 6.90**产品编号  
**285473006**

## CURRENT TRANSDUCER

**LEM**

- Current Transducer, HTFS Series, PCB, 400A, -600A to 600A, 1%, Voltage Output, 5 Vdc, M3
- The HTFS 400-P is a Current Transducer features as an electronic measurement of currents DC, AC, pulsed, mixed with a galvanic isolation between the primary circuit (high power) and the secondary circuit

3% OFF

**¥ 125.46**产品编号  
**913573106**

## CASE, ALUMINIUM, 52X120X160MM

**HAMMOND**  
MANUFACTURING.

- Metal Enclosure, 1455 Series, Extruded With Metal End Panels, Small, Extruded Aluminium, 51.5 mm
- The 1455Q1601 is an Instrument Case, designed to house PC boards or for equipment interfacing
- Sized for standard eurocards

5% OFF

**¥ 200.02**产品编号  
**151121406**

## CURRENT TRANSDUCER, 100A, PCB

**LEM**

- Current Transducer, LA Series, 10A, -150A to 150A, 0.7 %, Closed Loop Output, 12 Vdc to 15 Vdc
- The LA 100-P from LEM is a current transducer.
- Closed loop current transducer using the hall effect technology

**¥ 146.77**


## DC-DC CONVERTER, 5V, 3A

**TDK-Lambda**

- Isolated Through Hole DC/DC Converter, ITE, 4:1, 15 W, 1 Output, 5 V, 3 A

**¥ 185.13**

## HEATSINK FOR PFE1000F

**TDK-Lambda**

- Heat Sink, Square, 0.78 °C/W, 100 mm, 33.4 mm, 160 mm
- The HAMF10T is a 33.4 x 160 x 100mm square Heat Sink made of A6063S-T5 body. This heat sink is approved by D-L group green procurement guideline DL-EMS-010

**¥ 300.74**

## ENCLOSURE, MULTIPURPOSE, HINGED, PC, GRY

**FIBOX**

- Plastic Enclosure, Hinged Cover, Multipurpose, Polycarbonate, 203.2 mm, 203 mm, 108 mm, IP66, IP67


**¥ 886.64**产品编号  
**277888306**人民币(元) | 自录商品参考标价  
为自录商品  
价格货币单位 不含税

本册产品的折扣优惠参照 2022 年 2 月 e络盟官网售价制定

\* 网单金额满人民币 200 元(不含增值税), 该订单即可享受免费送货服务

# 从 e络盟启程 开始您的应用开发之旅

作为电子系统设计和开发方面的行家,e络盟凭借专业的硬件设计和嵌入式软件开发知识,成为许多世界级半导体、医疗、航空航天、军事、汽车、工业和消费行业开发人员值得信赖的设计合作伙伴。

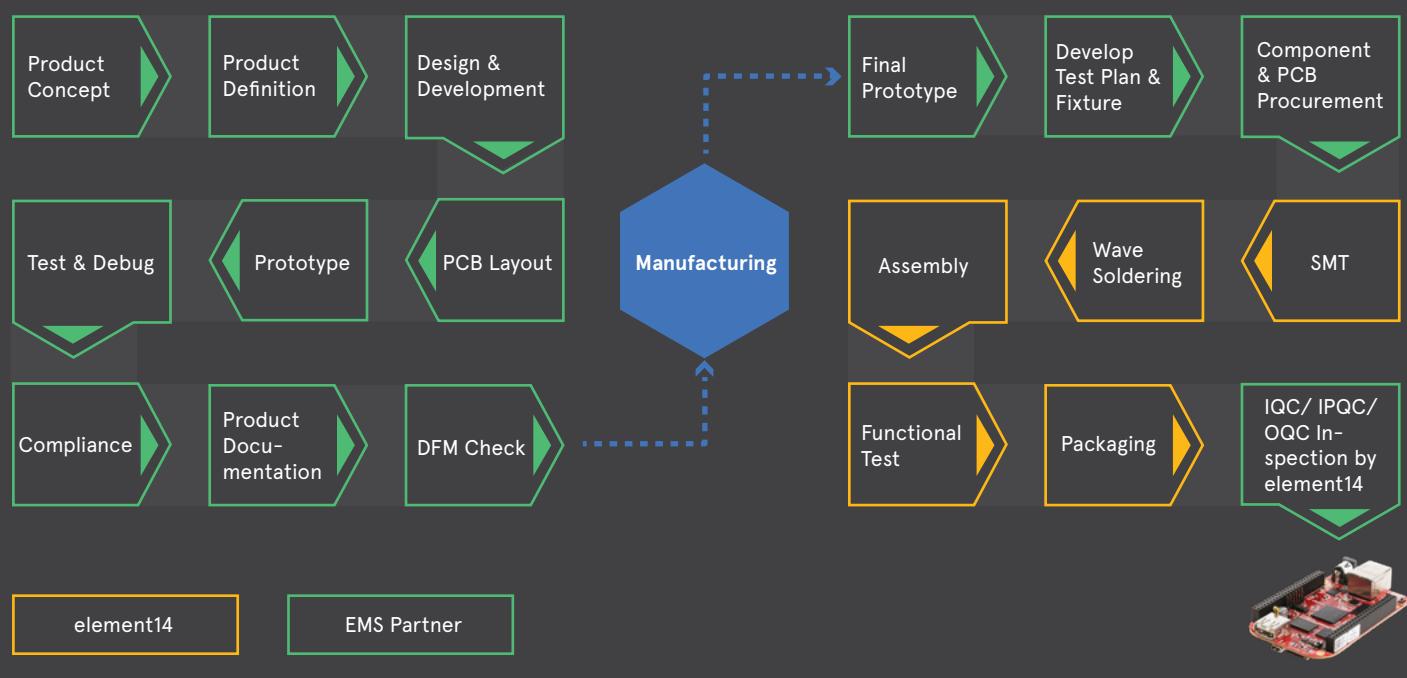

欢迎在线选购:  
[cn.element14.com/eselect05\\_devkit](http://cn.element14.com/eselect05_devkit)

## 热门开发工具



### BeagleBone Black 工业

产品编号: 352008306

AM3358 ARM Cortex-A8 MCU, 4GB eMMC板载闪存, USB接口



Arduino Mega 2560 开发板  
产品编号: 221277906



Raspberry Pi 3 B+ PoE HAT  
产品编号: 365188006



Arduino Uno R3 评估板  
产品编号: 207538206



继电器卡套件  
产品编号: 280426206



BeagleBone Black 套件  
产品编号: 352008106



嵌入式单板计算机  
产品编号: 351785406



工业应用开发套件  
产品编号: 242712206



Arduino Micro 开发板  
产品编号: 228519406




Arduino Nano 评估板  
产品编号: 184869106

Ready for Tomorrow

+ 30

新供应商加盟

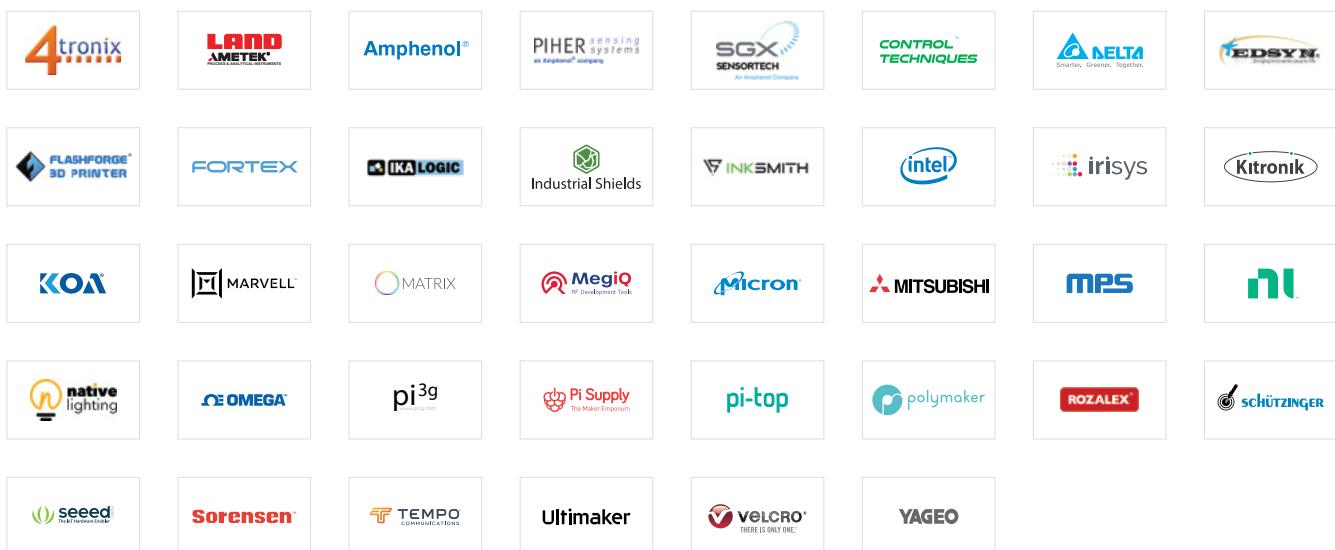

库存新增  
25%



欢迎与我们联络

官方网站: [cn.element14.com](http://cn.element14.com)  
客服热线: 400 820 5857

